

Air Conditioning Technical Data

2MXF-A



- > 2MXF40A2V1B
- > 2MXF50A2V1B


TABLE OF CONTENTS

2MXF-A

1	Features	2
2	Specifications	3
	Technical Specifications	3
	Electrical Specifications	4
3	Electrical data	5
4	Combination table	6
5	Capacity tables	7
	Capacity Table Legend	7
	Cooling Capacity Tables	8
	Heating Capacity Tables	11
6	Dimensional drawings	12
7	Centre of gravity	13
8	Piping diagrams	14
9	Wiring diagrams	15
	Wiring Diagrams - Single Phase	15
10	Sound data	16
	Sound Pressure Spectrum	16
11	Operation range	17

1 Features

- Seasonal efficiency values up to A+++ in cooling and A++ in heating thanks to its up-to-date technology and built-in intelligence
- Up to 2 indoor units can be connected to 1 multi outdoor unit; all indoor units are individually controllable and do not need to be installed in the same room or at the same time. They operate simultaneously within the same heating or cooling mode.
- Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- Different types of indoor units can be connected: e.g. wall mounted, ceiling mounted cassette corner, concealed ceiling unit
- Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency

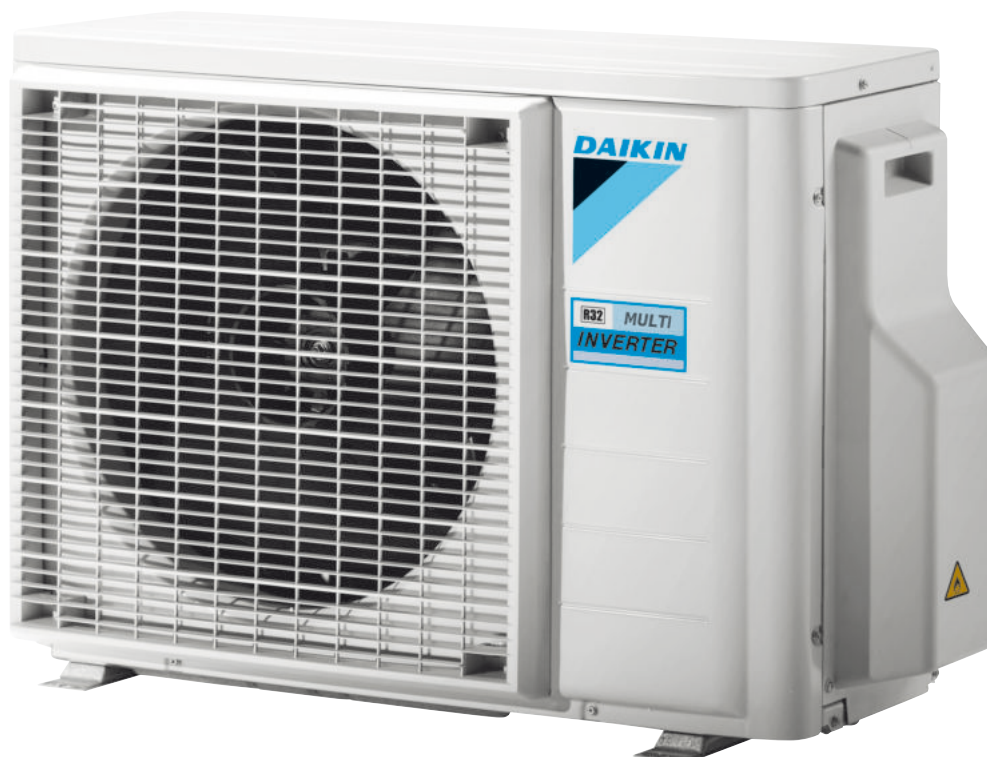

Inverter

2 Specifications

2-1 Technical Specifications					2MXF40A		2MXF50A	
Capacity control	Method				Variable (inverter)			
Casing	Colour				Ivory white			
Dimensions	Unit	Height	mm		550			
		Width	mm		765			
		Depth	mm		285			
	Packed unit	Height	mm		614			
		Width	mm		900			
		Depth	mm		357			
Weight	Unit		kg	36	41			
	Packed unit		kg	38	43			
Heat exchanger	Length		mm	805	810			
	Rows	Quantity		2				
	Fin pitch		mm	1.50				
	Stages	Quantity		24				
	Passes	Quantity		3.2				
	Tube type				7.0 Hi-XD	8.1 Hi-XA		
	Tube diameter		mm	7.0	8.1			
	Fin	Type		WF fin				
		Treatment		Anti-corrosion treatment				
	Compressor	Power input	Cooling	Nom.	W	970	1,246	
			Heating	Nom.	W	981	1,372	
Quantity		1						
Model				1YC25GXD#C	2YC40JXD#C			
Oil Amount		cm ³	375	650				
Type		Hermetically sealed swing compressor						
Output		W	800	1,300				
Oil Type		FW68DA						
Fan	Type		Propeller fan					
	Discharge direction		Horizontal					
	Quantity		1					
	Air flow rate	Cooling	High	m ³ /min	36	37		
				cfm	1,271	1,306		
		Heating	High	m ³ /min	32	34		
			cfm	1,130	1,200			
Fan motor	Quantity		1					
	Model		LFD-280-23-8F					
	Output		W	50				
	Speed	Cooling	High	rpm	900	950		
			Super low	rpm	500			
		Heating	High	rpm	820	890		
			Super low	rpm	320	500		
Sound power level	Cooling		dBA	60				
	Heating		dBA	62				
Sound pressure level	Cooling	High	dBA	46	48			
	Heating	High	dBA	48	50			
Operation range	Cooling	Ambient	Min.	°CDB	-10			
			Max.	°CDB	46			
	Heating	Ambient	Max.	°CDB	24			
Refrigerant	Type		R-32					
	Charge	kg		0.88	1.15			
		TCO ₂ eq		0.60	0.78			
	Control		Expansion valve					
	GWP		675					

2 Specifications

2

2-1 Technical Specifications				2MXF40A	2MXF50A	
Piping connections	Liquid	Quantity		2		
		Type		Flare connection		
		OD	mm	6.4		
	Gas	Quantity		2	1	
		Type		Flare connection		
		OD	mm	9.5		
	Drain	Quantity		1		
		Type		Drain Joint		
		OD	mm	16 (inner diameter of connecting hose)		
	Gas 2	Quantity		-	1	
		Type		-	Flare connection	
		OD	mm	-	12.70	
	Piping length	OU - IU	Min.	m	3 (1)	
			Max.	m	20 (1)	
		System	Chargel ess	m	20	
Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 20m)		
Level difference	IU - OU	Max.	m	15.0		
	IU - IU	Max.	m	7.5		
Heat insulation			Both liquid and gas pipes			
Total piping length	System	Actual	m	30.0		

Standard Accessories : Installation manual; Quantity : 1;

Standard Accessories : Screw bag; Quantity : 1;

Standard Accessories : Drain plug; Quantity : 1;

Standard Accessories : Reducer assembly; Quantity : 1;

2-2 Electrical Specifications				2MXF40A	2MXF50A
Power supply	Phase		1~		
	Frequency	Hz	50		
	Voltage		V 220-230-240		
Wiring connections	For power supply		Quantity	3	
			Remark	Earth wire included	
	For connection with indoor		Quantity	4	
			Remark	Earth wire included	

Notes

(1) For one room

See separate drawing for operation range

See separate drawing for electrical data

Contains fluorinated greenhouse gases

3 Electrical data

3 - 1 Electrical Data

2MXF-A

Outdoor unit Model name	Power supply			-RA- indoor units (-10% safety factor) See note -5-		Other indoor units (-10% safety factor)		COMP		OFM	
	Hz	Voltag	Voltage range	MCA	MFA	MCA	MFA	RHz	RLA	kW	FLA
2MXM40M3V1B 2MXM40M4V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2MXM50M2V1B9 2MXM50M3V1B9	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,94	16	13,27	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		
2AMXM40M3V1B 2AMXM40M4V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2AMXM50M3V1B 2AMXM50M4V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,94	16	13,27	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		
2AMXF40A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2AMXF50A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,83	16	12,83	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		
2MXF40A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	9,80	16	9,80	16	-	5,1	0,040	0,17
	50	230							5,3		
	50	240							5,6		
2MXF50A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	12,83	16	12,83	16	-	5,9	0,042	0,18
	50	230							6,2		
	50	240							6,5		

Notes

- 1) The -RLA- is based on the following conditions.
Outdoor temperature -35°C DB
Indoor temperature -27°C DB / -19°C WB
- 2) Select the wire size according to the MCA.
- 3) The maximum allowable voltage that is unbalanced between phases is -2%.
- 4) Use a circuit breaker instead of a fuse.
- 5) Only for wall-mounted -FVXM- units

Symbols

- MCA: Minimum Circuit Ampere [A]
MFA: Maximum Fuse Ampere [A]
RLA: Rated load amps [A]
OFM: Outdoor fan motor
RHz: Rated operating frequency [Hz]
FLA: Full Load Ampere [A]
kW: Fan motor rated output [kW]

3D110207D

4 Combination table

4 - 1 Combination Table

4

2MXF40A

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF40A2V1B	2.0	2.00	---	1.30	2.00	2.40	0.33	0.44	0.57	1.78	2.38	3.09	79
	2.5	2.50	---	1.30	2.50	3.00	0.33	0.61	0.80	1.78	3.33	4.40	79
	3.5	3.50	---	1.30	3.50	4.00	0.33	1.04	1.35	1.78	5.71	7.38	79
	2.0+2.0	2.00	2.00	1.50	4.00	4.20	0.30	1.02	1.20	1.67	5.64	5.93	79
	2.0+2.5	1.78	2.22	1.50	4.00	4.30	0.30	1.01	1.20	1.67	5.57	6.02	79
	2.0+3.5	1.45	2.55	1.50	4.00	4.50	0.30	0.99	1.29	1.67	5.46	6.24	79
	2.5+2.5	2.00	2.00	1.50	4.00	4.40	0.30	1.00	1.25	1.67	5.51	6.13	79
	2.5+3.5	1.67	2.33	1.50	4.00	4.60	0.30	0.98	1.28	1.67	5.40	6.32	79

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF40A2V1B	2.0	3.00	---	1.00	3.00	3.70	0.26	0.83	1.26	1.43	4.52	6.89	79
	2.5	3.40	---	1.00	3.40	4.10	0.26	1.02	1.50	1.43	5.59	8.20	79
	3.5	3.80	---	1.00	3.80	4.40	0.26	1.28	1.73	1.43	7.35	9.51	79
	2.0+2.0	2.10	2.10	1.30	4.20	4.60	0.24	1.02	1.14	1.31	5.64	6.18	79
	2.0+2.5	1.87	2.33	1.30	4.20	4.70	0.24	1.01	1.16	1.31	5.59	6.26	79
	2.0+3.5	1.53	2.67	1.30	4.20	4.80	0.24	0.99	1.16	1.31	5.48	6.27	79
	2.5+2.5	2.10	2.10	1.30	4.20	4.70	0.24	1.00	1.14	1.31	5.53	6.19	79
	2.5+3.5	1.75	2.45	1.30	4.20	4.80	0.24	0.98	1.14	1.31	5.42	6.20	79

Notes

- The total capacity of each connected indoor unit is up to -6.0-kW.
- The values above are for connecting with the following indoor unit types:
 - 2.0, 2.5, 3.5- kW class
 - Wall-mounted -FTXF-A, FTXF-B- series
- These indoor units can only be used in a multi-unit setup.
- Cooling capacity conditions
 - Indoor temperature -27°C DB / -19°C WB
 - Outdoor temperature -35°C DB
- Heating capacity conditions
 - Indoor temperature -20°C DB
 - Outdoor temperature -7°C DB / -6°C WB

3D126692A

2MXF50A

Cooling (50Hz 230V)

Outdoor unit	Indoor unit	Cooling capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF50A2V1B	2.0	2.00	---	1.40	2.00	2.60	0.31	0.47	0.69	1.53	2.25	3.37	89
	2.5	2.50	---	1.40	2.50	3.10	0.31	0.67	0.92	1.53	3.27	4.50	89
	3.5	3.50	---	1.40	3.50	4.00	0.31	1.09	1.42	1.53	5.32	6.95	89
	2.0+2.0	2.00	2.00	1.80	4.00	5.00	0.43	1.12	1.48	1.64	5.48	6.85	89
	2.0+2.5	2.00	2.50	1.80	4.50	5.10	0.44	1.27	1.51	1.64	6.22	7.05	89
	2.0+3.5	1.82	3.18	1.80	5.00	5.40	0.46	1.47	1.72	1.64	7.20	7.78	89
	2.5+2.5	2.50	2.50	1.80	5.00	5.30	0.46	1.48	1.64	1.64	7.25	7.69	89
	2.5+3.5	2.08	2.92	1.80	5.00	5.40	0.46	1.47	1.65	1.64	7.16	7.74	89
3.5+3.5	2.50	2.50	1.80	5.00	5.40	0.45	1.45	1.63	1.64	7.08	7.65	89	

Heating (50Hz 230V)

Outdoor unit	Indoor unit	Heating capacity [kW]		Total capacity [kW]			Power input [kW]			Total current [A]			Power factor [%]
		Room A	Room B	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	Minimum	Nominal	Maximum	
2MXF50A2V1B	2.0	3.00	---	1.10	3.00	3.70	0.27	0.82	1.13	1.33	3.99	5.52	89
	2.5	3.40	---	1.10	3.40	4.10	0.25	0.99	1.34	1.23	4.81	6.54	89
	3.5	4.00	---	1.10	4.00	4.60	0.25	1.24	1.53	1.23	6.03	7.46	89
	2.0+2.0	2.60	2.60	1.20	5.20	5.70	0.30	1.40	1.53	1.12	6.84	7.50	89
	2.0+2.5	2.49	3.11	1.20	5.60	5.80	0.30	1.50	1.55	1.12	7.34	7.81	89
	2.0+3.5	2.04	3.56	1.20	5.60	5.90	0.30	1.49	1.56	1.23	7.31	7.71	89
	2.5+2.5	2.80	2.80	1.20	5.60	5.80	0.30	1.51	1.55	1.12	7.38	7.65	89
	2.5+3.5	2.33	3.27	1.20	5.60	6.00	0.31	1.48	1.59	1.23	7.24	7.76	89
3.5+3.5	2.80	2.80	1.30	5.60	6.10	0.33	1.47	1.61	1.23	7.19	7.84	89	

Notes

- The total capacity of each connected indoor unit is up to -7.0-kW.
- The values above are for connecting with the following indoor unit types:
 - 2.0, 2.5, 3.5- kW class
 - Wall-mounted -FTXF-A, FTXF-B- series
- These indoor units can only be used in a multi-unit setup.
- Cooling capacity conditions
 - Indoor temperature -27°C DB / -19°C WB
 - Outdoor temperature -35°C DB
- Heating capacity conditions
 - Indoor temperature -20°C DB
 - Outdoor temperature -7°C DB / -6°C WB

3D126693A

6

5 Capacity tables


5 - 1 Capacity Table Legend

In order to fulfill more your requirements on quick access of data in the format you require, we have developed a tool to consult capacity tables.

Below you can find the link to the capacity table database and an overview of all the tools we have to help you select the correct product:

- **Capacity table database:** lets you find back and export quickly the capacity information you are looking for based upon unit model, refrigerant temperature and connection ratio.
- You can access the capacity table viewer here:

https://my.daikin.eu/content/denv/en_US/home/applications/software-finder/capacity-table-viewer.html



- An overview of **all software tools** that we offer can be found here:

https://my.daikin.eu/denv/en_US/home/applications/software-finder.html



5 Capacity tables

5 - 2 Cooling Capacity Tables

2MXF40A

Cooling (50Hz 230V)

①	②	Indoor air temperature [°C WB]											
		14°C		16°C		18°C		19°C		22°C		24°C	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
		kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW	kW
2.0+3.5	10,0	4,99	0,94	5,19	0,94	5,38	0,96	5,48	0,97	5,77	0,94	5,96	1,02
	12,0	4,87	0,94	5,11	0,96	5,30	0,98	5,40	0,99	5,69	0,95	5,88	1,03
	15,0	4,75	0,97	4,99	0,99	5,19	1,01	5,28	1,01	5,57	0,98	5,77	1,06
	18,0	4,63	1,00	4,87	1,02	5,07	1,03	5,16	1,04	5,46	1,01	5,65	1,09
	20,0	4,55	1,02	4,80	1,04	4,99	1,06	5,09	1,06	5,38	1,03	5,57	1,11
	22,0	4,47	1,04	4,72	1,06	4,91	1,08	5,01	1,09	5,30	1,05	5,49	1,13
	25,0	4,36	1,07	4,60	1,09	4,79	1,11	4,89	1,12	5,18	1,09	5,37	1,16
	28,0	4,24	1,11	4,48	1,13	4,63	1,14	4,77	1,15	5,06	1,12	5,26	1,20
	32,0	4,08	1,16	4,28	1,18	4,47	1,19	4,57	1,20	4,91	1,17	5,10	1,25
	35,0	3,97	1,19	4,16	1,20	4,35	1,22	4,50	1,29	4,79	1,21	4,98	1,29
	40,0	3,77	1,22	3,96	1,23	4,16	1,25	4,25	1,26	4,59	1,23	4,79	1,30
	43,0	3,65	1,26	3,85	1,28	4,04	1,29	4,14	1,30	4,48	1,27	4,67	1,35
	46,0	3,59	1,35	3,78	1,37	3,92	1,39	3,97	1,40	4,23	1,43	4,38	1,43
2.5+2.5	10,0	4,89	0,88	5,09	0,90	5,28	0,92	5,37	0,93	5,64	0,97	5,85	0,99
	12,0	4,81	0,90	5,01	0,92	5,18	0,94	5,29	0,95	5,55	0,99	5,77	1,01
	15,0	4,68	0,93	4,88	0,96	5,05	0,98	5,16	0,99	5,42	1,02	5,64	1,04
	18,0	4,55	0,97	4,75	0,99	4,92	1,01	5,03	1,02	5,30	1,05	5,51	1,07
	20,0	4,46	0,99	4,66	1,01	4,84	1,03	4,94	1,04	5,21	1,08	5,42	1,10
	22,0	4,38	1,02	4,58	1,04	4,75	1,06	4,86	1,07	5,12	1,10	5,34	1,12
	25,0	4,25	1,06	4,45	1,08	4,62	1,10	4,73	1,11	5,00	1,14	5,21	1,16
	28,0	4,12	1,10	4,32	1,12	4,49	1,14	4,60	1,15	4,87	1,18	5,08	1,20
	32,0	3,95	1,15	4,15	1,17	4,32	1,20	4,43	1,21	4,70	1,24	4,91	1,26
	35,0	3,82	1,19	4,02	1,21	4,19	1,23	4,40	1,25	4,57	1,28	4,78	1,30
	40,0	3,61	1,23	3,81	1,25	3,98	1,27	4,19	1,28	4,35	1,31	4,57	1,33
	43,0	3,48	1,28	3,68	1,30	3,85	1,32	4,06	1,33	4,23	1,36	4,44	1,39
	46,0	3,11	1,19	3,26	1,19	3,37	1,19	3,55	1,19	3,62	1,19	3,76	1,19
2.5+3.5	10,0	5,14	0,91	5,35	0,93	5,58	0,95	5,67	0,96	5,99	1,00	6,20	1,02
	12,0	5,06	0,93	5,27	0,95	5,48	0,97	5,59	0,98	5,90	1,02	6,12	1,04
	15,0	4,93	0,96	5,14	0,99	5,35	1,01	5,46	1,02	5,77	1,05	5,99	1,07
	18,0	4,80	1,00	5,01	1,02	5,22	1,04	5,33	1,05	5,65	1,08	5,86	1,10
	20,0	4,71	1,02	4,92	1,04	5,14	1,06	5,24	1,07	5,56	1,11	5,77	1,13
	22,0	4,63	1,05	4,84	1,07	5,05	1,09	5,16	1,10	5,47	1,13	5,69	1,15
	25,0	4,50	1,09	4,71	1,11	4,92	1,13	5,03	1,14	5,35	1,17	5,56	1,19
	28,0	4,37	1,13	4,58	1,15	4,79	1,17	4,90	1,18	5,22	1,21	5,43	1,23
	32,0	4,20	1,18	4,41	1,20	4,62	1,23	4,73	1,24	5,05	1,27	5,26	1,29
	35,0	4,07	1,23	4,28	1,25	4,49	1,27	4,60	1,28	4,92	1,31	5,13	1,33
	40,0	3,86	1,31	4,07	1,33	4,28	1,35	4,39	1,36	4,70	1,39	4,92	1,41
	43,0	3,73	1,36	3,94	1,38	4,15	1,40	4,26	1,41	4,58	1,44	4,79	1,47
	46,0	3,36	1,27	3,52	1,27	3,67	1,27	3,75	1,27	3,97	1,27	4,11	1,27

Symbols

- TC: Total capacity [kW]
- PI: Power input [kW]
- ①: Indoor unit combinations
- ②: Outdoor temperature [°C DB]

Notes

1. The capacities are based on the following conditions:
Corresponding refrigerant piping length: ·5· m
Level difference: ·0·m
2. The bold cells indicate the standard conditions.
3. The values above are for connecting with the following indoor unit types:
·2.0, 2.5, 3.5· kW class
Wall-mounted ·FTXF-A, FTXF-B· series

5 Capacity tables

5 - 2 Cooling Capacity Tables

5

2MXF50A

Cooling (50Hz 230V):

①	②	Indoor air temperature [°C WB]																					
		14°C			16°C			18°C			19°C			22°C			24°C						
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI				
2.0	10.0	2.91	0.50	3.03	0.51	3.15	0.52	3.21	0.52	3.38	0.54	3.50	0.56	3.62	0.57	3.74	0.58	3.85	0.59	3.99	0.61	4.11	0.62
	12.0	2.86	0.51	2.98	0.52	3.10	0.52	3.16	0.54	3.34	0.55	3.46	0.56	3.57	0.57	3.68	0.58	3.78	0.59	3.88	0.60	3.98	0.61
	15.0	2.78	0.52	2.90	0.54	3.02	0.55	3.08	0.55	3.26	0.57	3.38	0.58	3.49	0.59	3.60	0.60	3.70	0.61	3.80	0.62	3.90	0.63
	18.0	2.71	0.55	2.83	0.55	2.95	0.56	3.01	0.57	3.19	0.58	3.31	0.59	3.42	0.60	3.52	0.61	3.61	0.62	3.71	0.63	3.80	0.64
	20.0	2.66	0.56	2.78	0.57	2.90	0.57	0.00	0.58	3.14	0.59	3.26	0.61	3.37	0.62	3.47	0.63	3.56	0.64	3.65	0.65	3.74	0.66
	22.0	2.62	0.57	2.74	0.58	2.85	0.59	2.91	0.59	3.09	0.61	3.21	0.62	3.32	0.63	3.42	0.64	3.51	0.65	3.60	0.66	3.69	0.67
	25.0	2.54	0.58	2.66	0.59	2.78	0.61	2.84	0.62	3.03	0.63	3.14	0.64	3.25	0.65	3.35	0.66	3.44	0.67	3.53	0.68	3.62	0.69
	28.0	2.47	0.61	2.59	0.62	2.71	0.63	2.77	0.64	2.95	0.65	3.07	0.67	3.18	0.68	3.28	0.69	3.37	0.70	3.46	0.71	3.55	0.72
	32.0	2.37	0.64	2.49	0.65	2.61	0.67	2.67	0.67	2.85	0.68	2.97	0.69	3.08	0.70	3.18	0.71	3.27	0.72	3.36	0.73	3.45	0.74
	35.0	2.30	0.67	2.42	0.68	2.54	0.69	2.60	0.69	2.78	0.70	2.90	0.71	3.00	0.72	3.10	0.73	3.19	0.74	3.28	0.75	3.37	0.76
	40.0	2.18	0.70	2.30	0.71	2.42	0.73	2.48	0.74	2.66	0.75	2.78	0.76	2.89	0.77	2.99	0.78	3.08	0.79	3.17	0.80	3.26	0.81
	43.0	2.11	0.74	2.23	0.74	2.35	0.75	2.41	0.76	2.59	0.77	2.71	0.79	2.82	0.80	2.92	0.81	3.01	0.82	3.10	0.83	3.19	0.84
46.0	2.03	0.76	2.15	0.77	2.27	0.79	2.33	0.79	2.51	0.81	2.63	0.82	2.74	0.83	2.84	0.84	2.93	0.85	3.02	0.86	3.11	0.87	
2.5	10.0	3.47	0.65	3.61	0.66	3.76	0.68	3.83	0.68	4.03	0.69	4.17	0.73	4.30	0.74	4.42	0.75	4.53	0.76	4.64	0.77	4.75	0.78
	12.0	3.41	0.66	3.55	0.68	3.70	0.68	3.77	0.69	3.98	0.71	4.13	0.73	4.26	0.74	4.38	0.75	4.49	0.76	4.60	0.77	4.71	0.78
	15.0	3.31	0.68	3.46	0.69	3.60	0.71	3.67	0.71	3.89	0.74	4.03	0.76	4.16	0.77	4.28	0.78	4.39	0.79	4.50	0.80	4.61	0.81
	18.0	3.23	0.71	3.37	0.71	3.52	0.73	3.59	0.74	3.80	0.76	3.95	0.77	4.08	0.78	4.20	0.79	4.31	0.80	4.42	0.81	4.53	0.82
	20.0	3.17	0.73	3.31	0.74	3.46	0.74	3.53	0.76	3.74	0.77	3.89	0.79	4.02	0.80	4.14	0.81	4.25	0.82	4.36	0.83	4.47	0.84
	22.0	3.12	0.74	3.27	0.76	3.40	0.77	3.47	0.77	3.68	0.79	3.83	0.80	3.96	0.81	4.07	0.82	4.18	0.83	4.29	0.84	4.40	0.85
	25.0	3.03	0.76	3.17	0.77	3.31	0.79	3.39	0.80	3.60	0.82	3.74	0.84	3.87	0.85	3.98	0.86	4.09	0.87	4.20	0.88	4.31	0.89
	28.0	2.95	0.79	3.09	0.80	3.23	0.82	3.30	0.84	3.52	0.85	3.66	0.87	3.79	0.88	3.91	0.89	4.02	0.90	4.13	0.91	4.24	0.92
	32.0	2.83	0.84	2.97	0.85	3.11	0.87	3.18	0.87	3.40	0.88	3.54	0.90	3.67	0.91	3.78	0.92	3.89	0.93	4.00	0.94	4.11	0.95
	35.0	2.74	0.87	2.89	0.88	3.03	0.90	3.10	0.92	3.31	0.92	3.46	0.93	3.57	0.94	3.68	0.95	3.79	0.96	3.90	0.97	4.01	0.98
	40.0	2.60	0.92	2.74	0.93	2.89	0.95	2.96	0.96	3.17	0.98	3.31	1.00	3.44	1.01	3.56	1.02	3.67	1.03	3.78	1.04	3.89	1.05
	43.0	2.52	0.96	2.66	0.96	2.80	0.98	2.87	1.00	3.09	1.01	3.23	1.03	3.36	1.04	3.47	1.05	3.58	1.06	3.69	1.07	3.80	1.08
46.0	2.42	1.00	2.56	1.01	2.71	1.03	2.78	1.03	2.99	1.06	3.14	1.07	3.27	1.08	3.38	1.09	3.49	1.10	3.60	1.11	3.71	1.12	
3.5	10.0	4.48	1.01	4.66	1.03	4.85	1.06	4.94	1.06	5.20	1.08	5.38	1.13	5.54	1.15	5.69	1.17	5.83	1.19	5.97	1.21	6.11	1.23
	12.0	4.40	1.03	4.58	1.06	4.77	1.06	4.86	1.08	5.14	1.11	5.32	1.13	5.46	1.15	5.59	1.17	5.72	1.19	5.85	1.21	5.98	1.23
	15.0	4.28	1.06	4.46	1.08	4.65	1.11	4.74	1.11	5.02	1.16	5.20	1.18	5.34	1.20	5.47	1.22	5.60	1.24	5.73	1.26	5.86	1.28
	18.0	4.17	1.11	4.35	1.11	4.54	1.13	4.63	1.16	4.91	1.18	5.09	1.20	5.23	1.22	5.36	1.24	5.49	1.26	5.62	1.28	5.75	1.30
	20.0	4.09	1.13	4.28	1.16	4.46	1.16	4.55	1.18	4.83	1.20	5.02	1.23	5.16	1.25	5.29	1.27	5.42	1.29	5.55	1.31	5.68	1.33
	22.0	4.03	1.16	4.22	1.18	4.38	1.20	4.48	1.20	4.75	1.23	4.94	1.25	5.08	1.27	5.21	1.29	5.34	1.31	5.47	1.33	5.60	1.35
	25.0	3.91	1.18	4.09	1.20	4.28	1.23	4.37	1.25	4.65	1.28	4.83	1.30	4.97	1.32	5.09	1.34	5.21	1.36	5.33	1.38	5.45	1.40
	28.0	3.80	1.23	3.98	1.25	4.17	1.28	4.26	1.30	4.54	1.33	4.72	1.35	4.85	1.37	4.97	1.39	5.09	1.41	5.21	1.43	5.33	1.45
	32.0	3.65	1.30	3.83	1.33	4.02	1.35	4.11	1.35	4.38	1.38	4.57	1.40	4.70	1.42	4.82	1.44	4.94	1.46	5.06	1.48	5.18	1.50
	35.0	3.54	1.35	3.72	1.38	3.91	1.40	4.00	1.42	4.28	1.42	4.46	1.45	4.59	1.47	4.71	1.49	4.83	1.51	4.95	1.53	5.07	1.55
	40.0	3.35	1.42	3.54	1.45	3.72	1.47	3.82	1.50	4.09	1.52	4.28	1.55	4.41	1.57	4.53	1.59	4.65	1.61	4.77	1.63	4.89	1.65
	43.0	3.25	1.50	3.43	1.50	3.62	1.52	3.71	1.55	3.98	1.57	4.17	1.60	4.29	1.62	4.40	1.64	4.51	1.66	4.62	1.68	4.73	1.70
46.0	3.12	1.55	3.31	1.57	3.49	1.60	3.58	1.60	3.86	1.64	4.05	1.67	4.17	1.66	4.28	1.68	4.39	1.70	4.50	1.72	4.61	1.74	

①	②	Indoor air temperature [°C WB]																					
		14°C			16°C			18°C			19°C			22°C			24°C						
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI				
2.0+2.0	10.0	5.60	1.12	5.83	1.14	6.06	1.17	6.17	1.17	6.50	1.19	6.73	1.23	6.96	1.26	7.19	1.29	7.42	1.32	7.65	1.35	7.88	1.38
	12.0	5.50	1.14	5.73	1.17	5.96	1.16	6.08	1.19	6.42	1.21	6.65	1.23	6.88	1.26	7.11	1.29	7.34	1.32	7.57	1.35	7.80	1.38
	15.0	5.35	1.17	5.58	1.19	5.81	1.21	5.92	1.21	6.27	1.25	6.50	1.28	6.73	1.31	6.96	1.34	7.19	1.37	7.42	1.40	7.65	1.43
	18.0	5.21	1.21	5.44	1.21	5.67	1.23	5.79	1.25	6.13	1.28	6.37	1.30	6.60	1.33	6.83	1.36	7.06	1.39	7.29	1.42	7.52	1.45
	20.0	5.12	1.23	5.35	1.26	5.58	1.25	0.00	1.28	6.04	1.30	6.27	1.32	6.50	1.35	6.73	1.38	6.96	1.41	7.19	1.44	7.42	1.47
	22.0	5.04	1.26	5.27	1.28	5.48	1.30	5.60	1.30	5.94	1.32	6.17	1.34	6.40	1.37	6.63	1.40	6.86	1.43	7.09	1.46	7.32	1.49
	25.0	4.88	1.28	5.11	1.30	5.35	1.32	5.46	1.34	5.81	1.37	6.04	1.39	6.27	1.42	6.50	1.45	6.73	1.48	6.96	1.51	7.19	1.54
	28.0	4.75	1.32	4.98	1.34	5.21	1.37	5.33	1.39	5.67	1.41	5.90	1.43	6.13	1.46	6.36	1.49	6.59	1.52	6.82	1.55	7.05	1.58
	32.0	4.56	1.39	4.79	1.41	5.02	1.44	5.13	1.43	5.48	1.46	5.71	1.48	5.94	1.51	6.17	1.54	6.40	1.57	6.63	1.60	6.86	1.63
	35.0	4.42	1.43	4.65	1.46	4.88	1.48	5.00	1.48	5.35	1.50	5.58	1.52	5.81	1.55	6.04	1.58	6.27	1.61	6.50	1.64	6.73	1.67
	40.0	4.19	1.50	4.42	1.52	4.65	1.55	4.77	1.57	5.12	1.59	5.35	1.61	5.58	1.64	5.81	1.67	6.04	1.70	6.27	1.73	6.50	1.76
	43.0	4.06	1.57	4.29	1.57	4.52	1.59	4.63	1.61	4.98	1.63	5.21	1.66	5.44	1.69	5.67	1.72	5.90	1.75	6.13	1.78	6.36	1.81
46.0	3.90	1.61	4.13	1.64	4.37	1.66	4.48	1.66	4.83	1.70	5.06	1.73	5.29	1.76	5.52	1.79	5.75	1.82	5.98	1.85	6.21	1.88	

Symbols

TC: Total capacity [kW]

PI: Power input [kW]

①: Indoor unit combinations

②: Outdoor temperature [°C DB]

Notes

- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5- m
Level difference:

5 Capacity tables

5 - 3 Heating Capacity Tables

2MXF40A

Heating (50Hz 230V)

①	②	Indoor air temperature [°C DB]																	
		16°C			18°C			20°C			21°C			22°C			24°C		
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
2.0	-15.0	2.05	1.00	1.99	1.01	1.94	1.02	1.92	1.03	1.89	1.04	1.84	1.05						
	-11.0	2.47	1.06	2.41	1.07	2.36	1.08	2.34	1.08	2.31	1.09	2.26	1.10						
	-6.0	2.88	1.11	2.83	1.12	2.78	1.13	2.76	1.13	2.73	1.14	2.68	1.15						
	0.0	3.30	1.16	3.25	1.17	3.20	1.18	3.17	1.18	3.15	1.19	3.10	1.20						
	6.0	3.80	1.22	3.75	1.23	3.70	1.26	3.67	1.25	3.65	1.25	3.60	1.26						
	10.0	4.14	1.26	4.09	1.27	4.03	1.28	4.01	1.29	3.98	1.29	3.93	1.30						
15.0	4.55	1.31	4.50	1.32	4.45	1.33	4.43	1.34	4.40	1.34	4.35	1.35							
2.5	-15.0	2.45	1.28	2.34	1.29	2.29	1.30	2.27	1.31	2.24	1.32	2.19	1.32						
	-11.0	2.67	1.30	2.61	1.31	2.56	1.32	2.54	1.32	2.51	1.33	2.46	1.34						
	-6.0	3.28	1.35	3.13	1.36	3.08	1.37	3.06	1.37	3.03	1.38	2.98	1.39						
	0.0	3.70	1.40	3.65	1.41	3.60	1.42	3.57	1.42	3.55	1.43	3.50	1.44						
	6.0	4.20	1.46	4.15	1.47	4.10	1.50	4.07	1.49	4.05	1.49	4.00	1.50						
	10.0	4.54	1.50	4.49	1.51	4.43	1.52	4.41	1.53	4.38	1.53	4.33	1.54						
3.5	-15.0	2.64	1.50	2.58	1.51	2.53	1.52	2.50	1.53	2.47	1.54	2.42	1.55						
	-11.0	2.93	1.51	2.87	1.52	2.81	1.53	2.78	1.54	2.75	1.55	2.69	1.56						
	-6.0	3.43	1.52	3.37	1.54	3.31	1.55	3.28	1.56	3.25	1.57	3.19	1.59						
	0.0	3.93	1.59	3.86	1.61	3.80	1.62	3.77	1.63	3.74	1.64	3.68	1.66						
	6.0	4.52	1.68	4.46	1.69	4.40	1.73	4.37	1.72	4.34	1.73	4.28	1.74						
	10.0	4.92	1.74	4.86	1.75	4.80	1.76	4.77	1.77	4.74	1.78	4.68	1.80						
2.0+2.0	-15.0	2.50	0.93	2.48	0.93	2.42	0.94	2.39	0.95	2.35	0.95	2.29	0.96						
	-11.0	3.06	0.97	3.00	0.98	2.94	0.99	2.91	1.00	2.87	1.00	2.81	1.01						
	-6.0	3.58	1.02	3.52	1.03	3.46	1.04	3.43	1.04	3.39	1.05	3.33	1.06						
	0.0	4.10	1.06	4.04	1.07	3.98	1.08	3.94	1.09	3.91	1.09	3.85	1.10						
	6.0	4.73	1.12	4.66	1.13	4.60	1.14	4.57	1.15	4.54	1.15	4.47	1.16						
	10.0	5.14	1.16	5.08	1.17	5.02	1.18	4.98	1.18	4.95	1.19	4.89	1.20						
2.0+2.5	-15.0	2.60	0.94	2.58	0.95	2.48	0.96	2.44	0.96	2.39	0.97	2.33	0.98						
	-11.0	3.16	0.98	3.10	0.99	3.01	1.00	2.96	1.01	2.92	1.01	2.86	1.02						
	-6.0	3.68	1.03	3.62	1.04	3.53	1.05	3.50	1.05	3.46	1.06	3.40	1.07						
	0.0	4.20	1.07	4.14	1.08	4.05	1.09	4.01	1.10	3.98	1.10	3.92	1.11						
	6.0	4.83	1.13	4.76	1.14	4.70	1.16	4.67	1.16	4.64	1.16	4.57	1.17						
	10.0	5.24	1.17	5.18	1.18	5.12	1.19	5.08	1.19	5.05	1.20	4.99	1.21						

Notes

- The capacities are based on the following conditions:
Corresponding refrigerant piping length: 5- m
Level difference: 0-m
- The bold cells indicate the standard conditions.
- The values above are for connecting with the following indoor unit types:
-2.0, 2.5, 3.5- kW class
Wall-mounted ·FTXF-A, FTXF-B- series
- The heating capacity does not include the capacity drop that occurs during a frosting period and defrost operation.

①	②	Indoor air temperature [°C DB]																	
		16°C			18°C			20°C			21°C			22°C			24°C		
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
2.0+3.5	-15.0	2.70	0.94	2.68	0.95	2.62	0.96	2.60	0.96	2.55	0.97	2.49	0.98						
	-11.0	3.26	0.98	3.20	0.99	3.14	1.00	3.11	1.01	3.07	1.01	3.01	1.02						
	-6.0	3.78	1.03	3.72	1.04	3.66	1.05	3.63	1.05	3.59	1.06	3.53	1.07						
	0.0	4.30	1.07	4.24	1.08	4.18	1.09	4.14	1.10	4.11	1.10	4.05	1.11						
	6.0	4.93	1.13	4.86	1.14	4.80	1.16	4.77	1.16	4.74	1.16	4.67	1.17						
	10.0	5.34	1.17	5.28	1.18	5.22	1.19	5.18	1.19	5.15	1.20	5.09	1.21						
2.5+2.5	-15.0	2.58	0.91	2.55	0.92	2.49	0.93	2.44	0.94	2.41	0.95	2.34	0.96						
	-11.0	3.13	0.96	3.08	0.98	3.02	0.99	2.97	1.00	2.94	1.00	2.87	1.01						
	-6.0	3.66	1.01	3.59	1.02	3.53	1.03	3.50	1.04	3.47	1.04	3.40	1.06						
	0.0	4.19	1.06	4.12	1.07	4.06	1.08	4.03	1.09	4.00	1.09	3.93	1.10						
	6.0	4.83	1.12	4.77	1.13	4.70	1.14	4.67	1.15	4.64	1.15	4.57	1.16						
	10.0	5.19	1.16	5.15	1.17	5.12	1.18	5.09	1.18	5.06	1.19	4.99	1.20						
2.5+3.5	-15.0	2.70	0.93	2.69	0.93	2.62	0.95	2.59	0.95	2.56	0.96	2.49	0.97						
	-11.0	3.28	0.97	3.22	0.98	3.15	0.99	3.12	1.00	3.09	1.00	3.02	1.01						
	-6.0	3.81	1.02	3.75	1.03	3.68	1.04	3.65	1.04	3.62	1.05	3.55	1.06						
	0.0	4.34	1.06	4.28	1.07	4.21	1.09	4.18	1.09	4.15	1.10	4.08	1.11						
	6.0	4.98	1.12	4.91	1.13	4.80	1.14	4.75	1.15	4.71	1.15	4.62	1.16						
	10.0	5.40	1.16	5.34	1.17	5.27	1.18	5.24	1.18	5.21	1.19	5.14	1.20						

Symbols

- TC: Total capacity [kW]
- PI: Power input [kW]
- ①: Indoor unit combinations
- ②: Outdoor temperature [°C WB]

3D126701A

2MXF50A

Heating (50Hz 230V)


①	②	Indoor air temperature [°C DB]																	
		16°C			18°C			20°C			21°C			22°C			24°C		
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
2.0	-15.0	2.05	0.85	1.99	0.86	1.94	0.87	1.92	0.88	1.89	0.89	1.84	0.90						
	-11.0	2.47	0.93	2.41	0.94	2.36	0.95	2.34	0.96	2.31	0.96	2.26	0.97						
	-6.0	2.88	0.99	2.83	1.00	2.78	1.01	2.76	1.01	2.73	1.02	2.68	1.02						
	0.0	3.30	1.05	3.25	1.06	3.20	1.07	3.17	1.07	3.15	1.08	3.10	1.09						
	6.0	3.80	1.11	3.75	1.12	3.70	1.13	3.67	1.13	3.65	1.14	3.60	1.15						
	10.0	4.14	1.15	4.09	1.16	4.03	1.17	4.01	1.17	3.98	1.18	3.93	1.19						
2.5	-15.0	2.45	1.18	2.34	1.19	2.29	1.20	2.27	1.20	2.24	1.21	2.19	1.22						
	-11.0	2.67	1.20	2.61	1.21	2.56	1.22	2.54	1.22	2.51	1.22	2.46	1.23						
	-6.0	3.28	1.24	3.13	1.25	3.08	1.26	3.06	1.26	3.03	1.27	2.98	1.28						
	0.0	3.70	1.29	3.65	1.30	3.60	1.31	3.57	1.31	3.55	1.31	3.50	1.32						
	6.0	4.20	1.34	4.15	1.35	4.10	1.34	4.07	1.36	4.05	1.37	4.00	1.38						
	10.0	4.54	1.38	4.49	1.39	4.43	1.40	4.41	1.40	4.38	1.41	4.33	1.42						
3.5	-15.0	2.64	1.30	2.58	1.31	2.53	1.32	2.50	1.33	2.47	1.34	2.42	1.35						
	-11.0	2.93	1.31	2.87	1.32	2.81	1.33	2.78	1.34	2.75	1.35	2.69	1.36						
	-6.0	3.43	1.36	3.37	1.37	3.31	1.38	3.28	1.39	3.25	1.39	3.19	1.41						
	0.0	4.00	1.44	3.94	1.45	3.87	1.47	3.84	1.47	3.81	1.48	3.75	1.49						
	6.0	4.73	1.52	4.66	1.54	4.60	1.53	4.58	1.56	4.54	1.56	4.47	1.58						
	10.0	5.14	1.57	5.08	1.58	5.02	1.60	4.98	1.60	4.95	1.61	4.89	1.62						
2.0+2.0	-15.0	2.51	1.21	2.49	1.21	2.43	1.22	2.40	1.24	2.36	1.24	2.30	1.25						
	-11.0	3.15	1.26	3.08	1.28	3.00	1.29	2.96	1.29	2.92	1.30	2.84	1.31						
	-6.0	3.66	1.31	3.60	1.32	3.54	1.33	3.51	1.33	3.48	1.34	3.41	1.35						
	0.0	4.18	1.36	4.12	1.37	4.06	1.38	4.03	1.38	4.00	1.39	3.93	1.40						
	6.0	4.81	1.42	4.74	1.43	4.68	1.44	4.65	1.44	4.62	1.45	4.55	1.4						

6 Dimensional drawings

6 - 1 Dimensional Drawings

6

2MXF-A

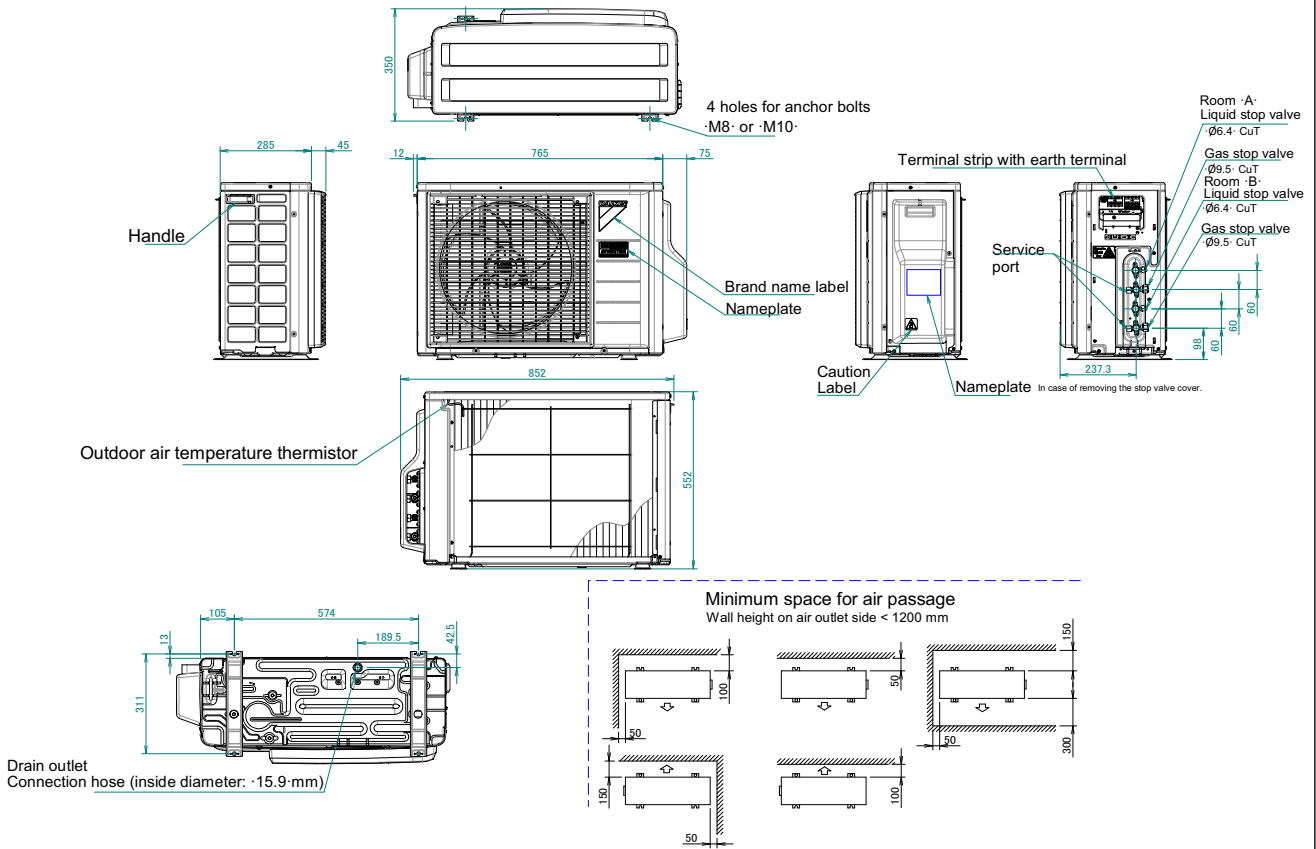


3D101252B

7 Centre of gravity

7 - 1 Centre of Gravity

2MXF-A

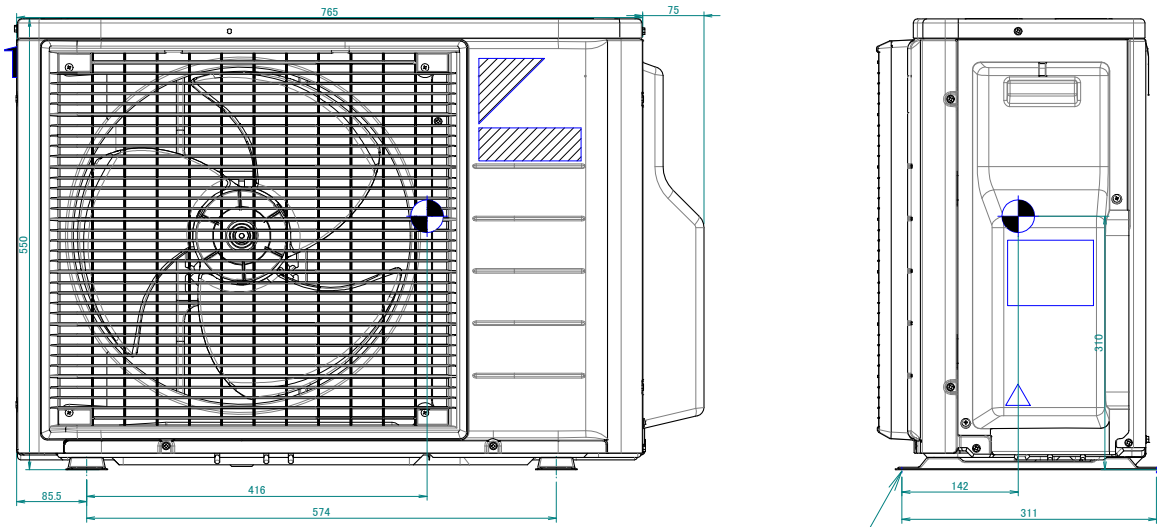



Foundation bolt hole

4D101315A

8 Piping diagrams

8 - 1 Piping Diagrams

8

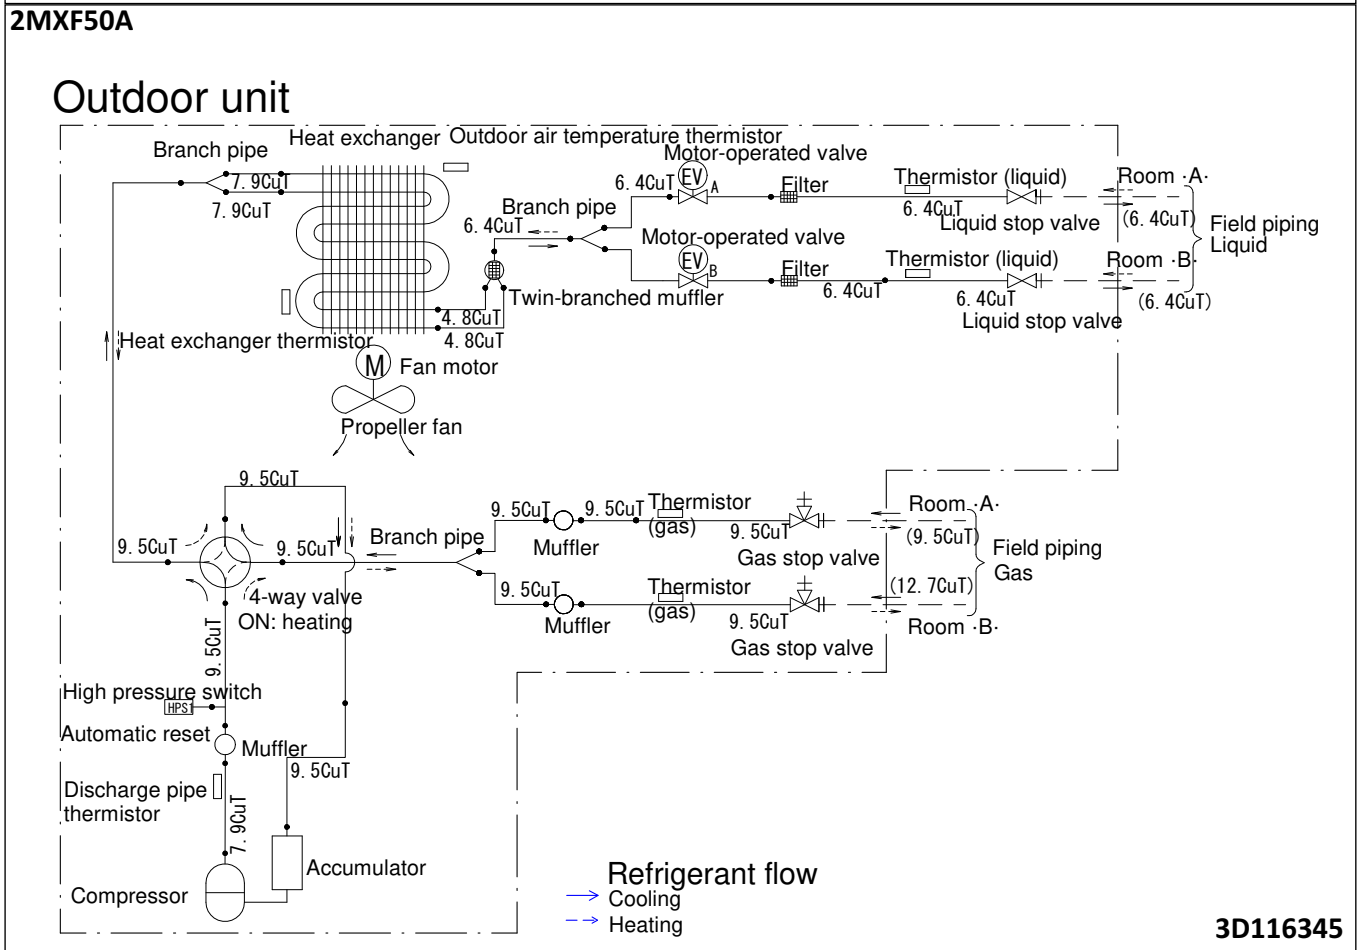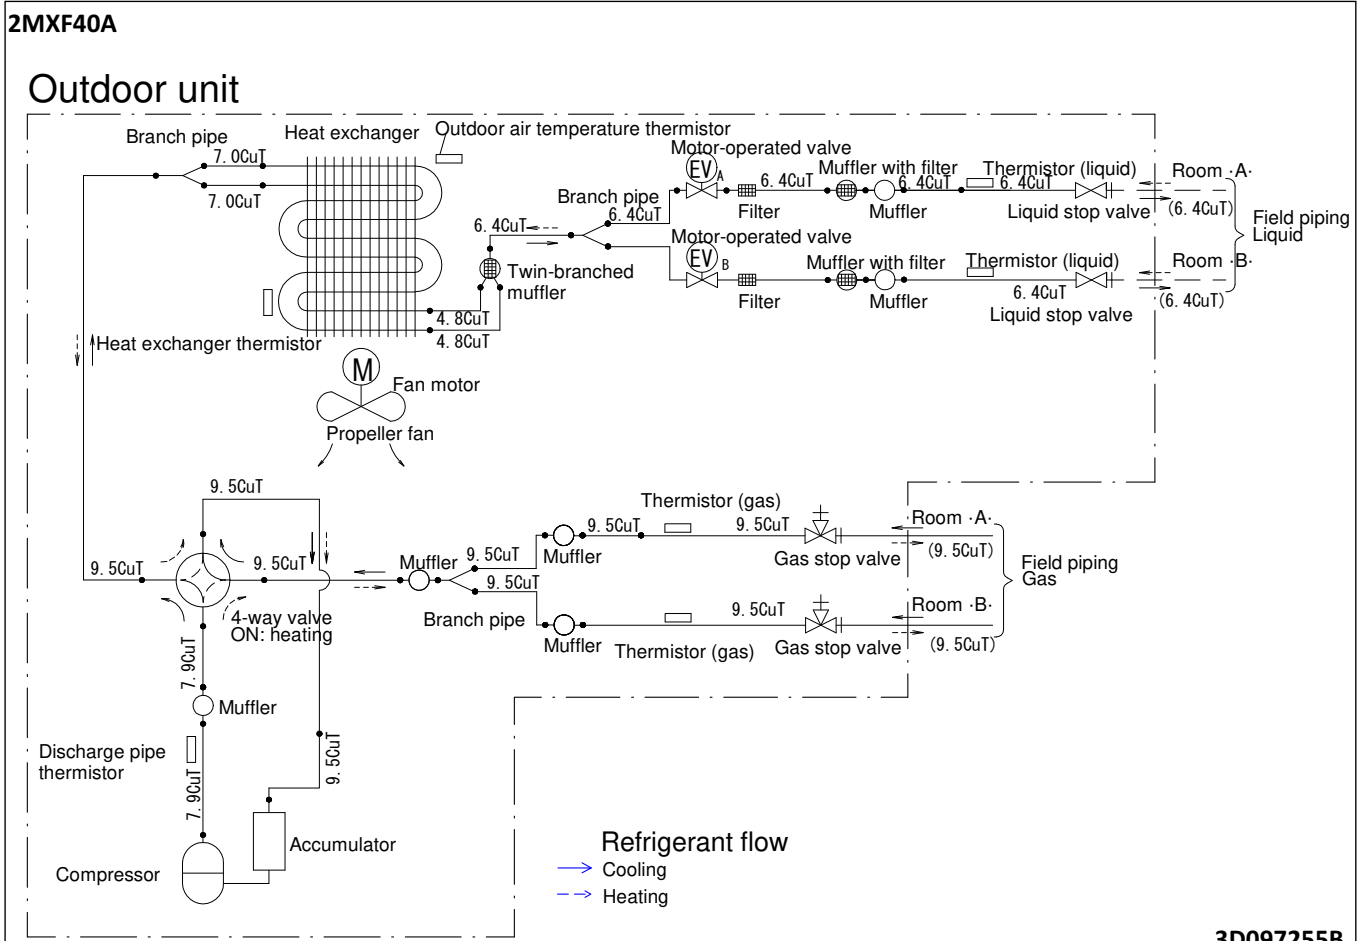


9 Wiring diagrams

9 - 1 Wiring Diagrams - Single Phase

2MXF40A

Wiring diagram

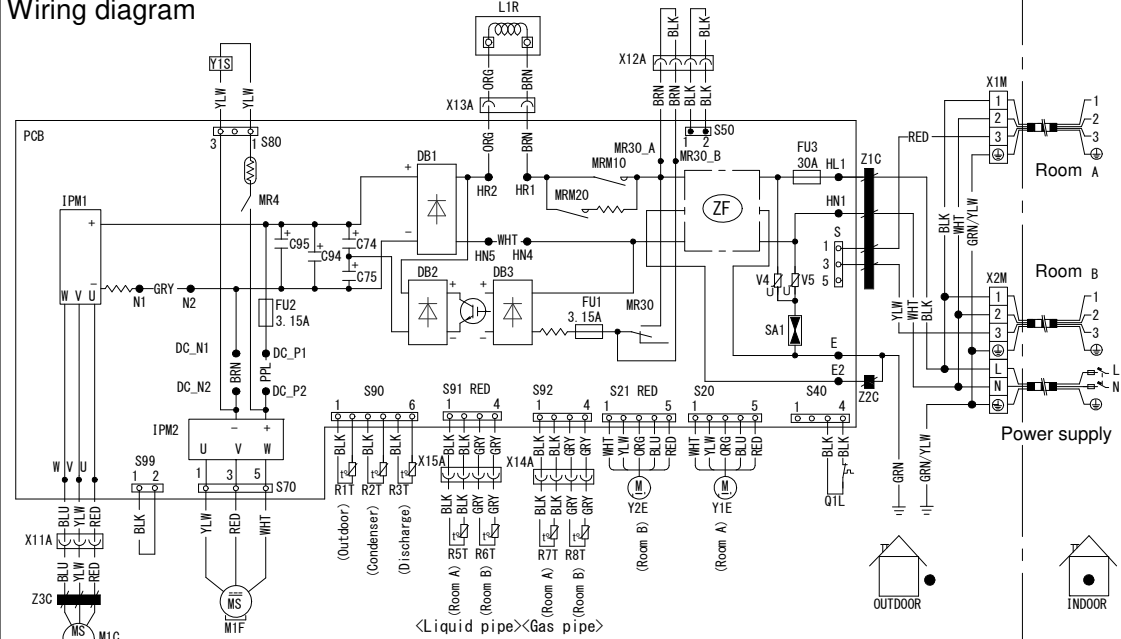


C74, C75, C94, C95	Capacitor	SA1	Surge arrestor	
DB1, DB2, DB3	Diode bridge			
FU1, FU2, FU3	Fuse	V4, V5	Varistor	
IPM1	Intelligent power module	X1M-X2M	Terminal strip with earth terminal	Field wiring
L1R	Reactor	Y1E-Y2E	Electronic expansion valve coil	Screw terminal
M1C	Compressor motor	Y1S	Reversing solenoid valve coil	Connector
M1F	Fan motor	ZF	Noise filter	WHT: white
MRM10, MRM20	Magnetic relay	Z1C-Z3C	Ferrite core	BLK: black
MR4, MR30	Magnetic relay	S2-S502	Connector	ORG: orange
PCB	Printed circuit board	X11A-X15A	Connector	BLU: blue
Q1L	Overload protector	S99	Heating-to-cooling changeover	BRN: brown
R1T-R8T	Thermistor			GRN: green
				PPL: purple

3D114689A

2MXF50A

Wiring diagram

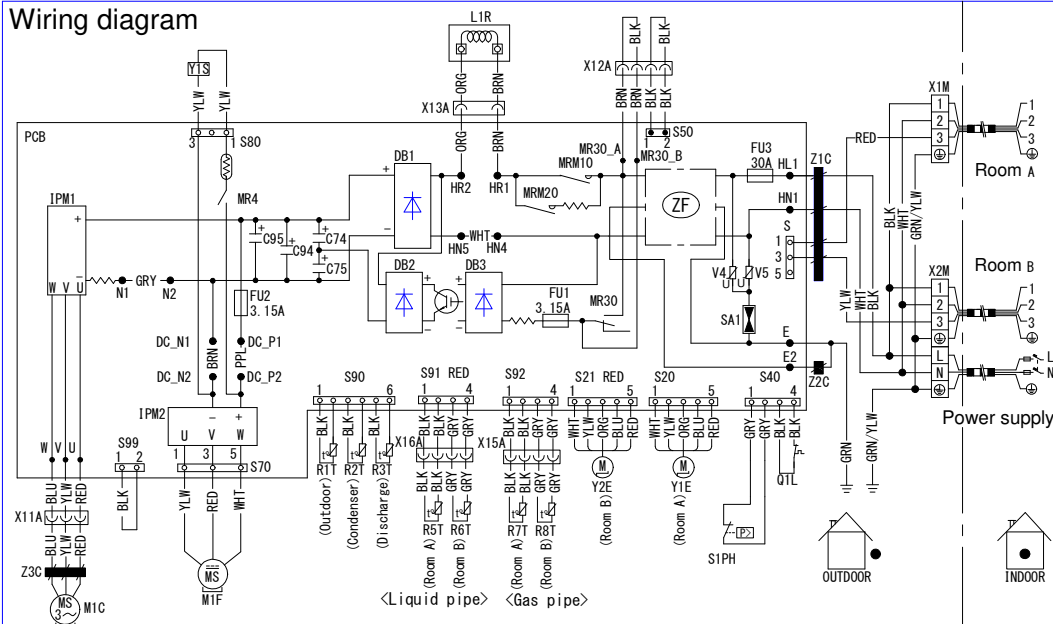



C74, C75, C94, C95	Capacitor	SA1	Surge arrestor	
DB1, DB2, DB3	Diode bridge	S1PH	High pressure switch	
FU1, FU2, FU3	Fuse	V4, V5	Varistor	
IPM1	Intelligent power module	X1M-X2M	Terminal strip with earth terminal	Field wiring
L1R	Reactor	Y1E-Y2E	Electronic expansion valve coil	Screw terminal
M1C	Compressor motor	Y1S	Reversing solenoid valve coil	Connector
M1F	Fan motor	ZF	Noise filter	WHT: white
MRM10, MRM20	Magnetic relay	Z1C-Z3C	Ferrite core	GRY: grey
MR4, MR30	Magnetic relay	S2-S502	Connector	ORG: orange
PCB	Printed circuit board	X11A-X16A	Connector	BLU: blue
Q1L	Overload protector	S99	Heating-to-cooling changeover	BRN: brown
R1T-R8T	Thermistor			GRN: green
				PPL: purple

3D114690B

10 Sound data

10 - 1 Sound Pressure Spectrum



10

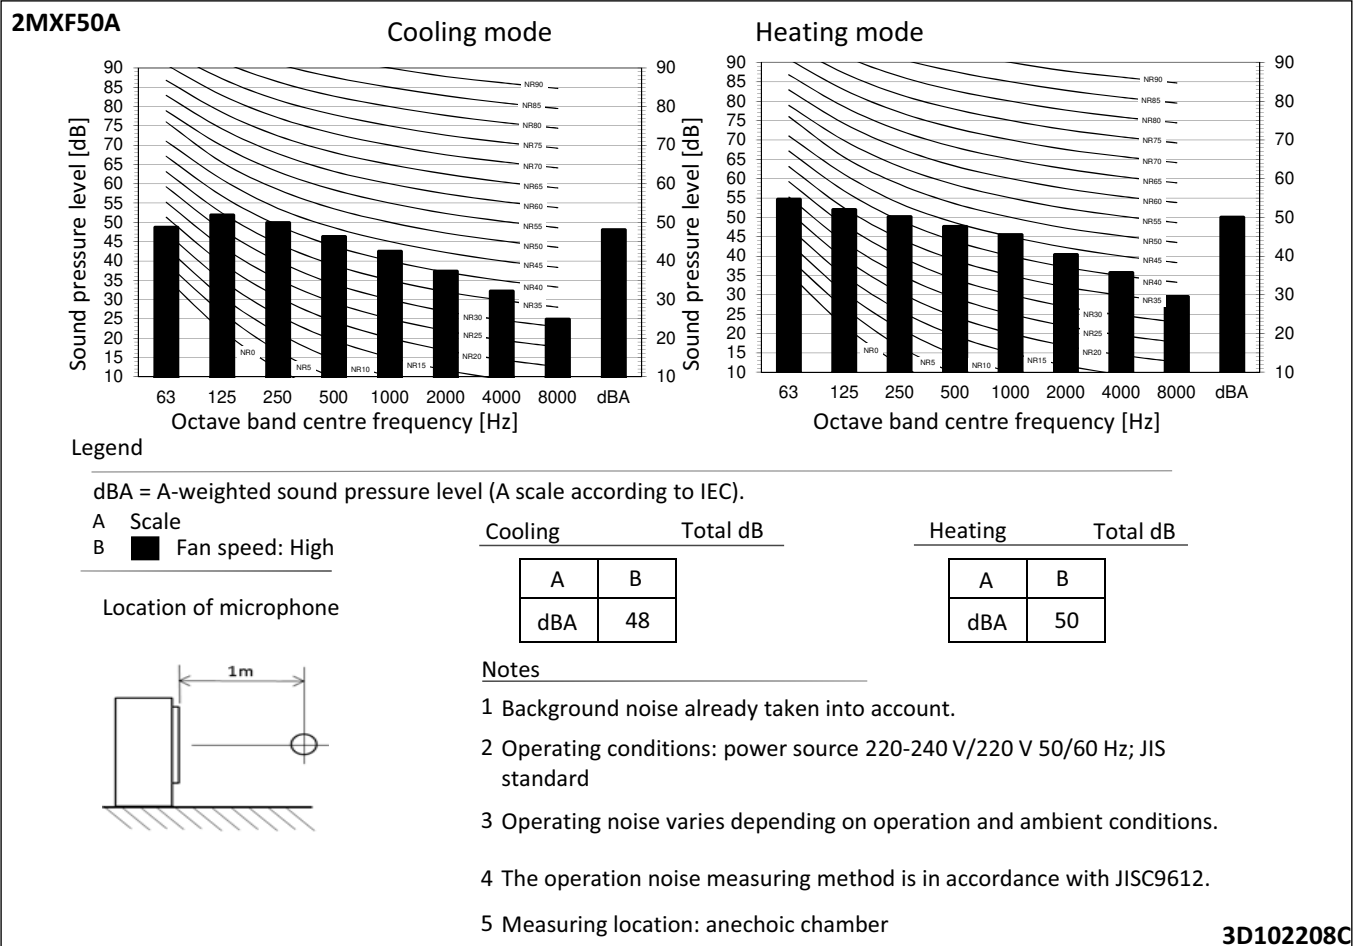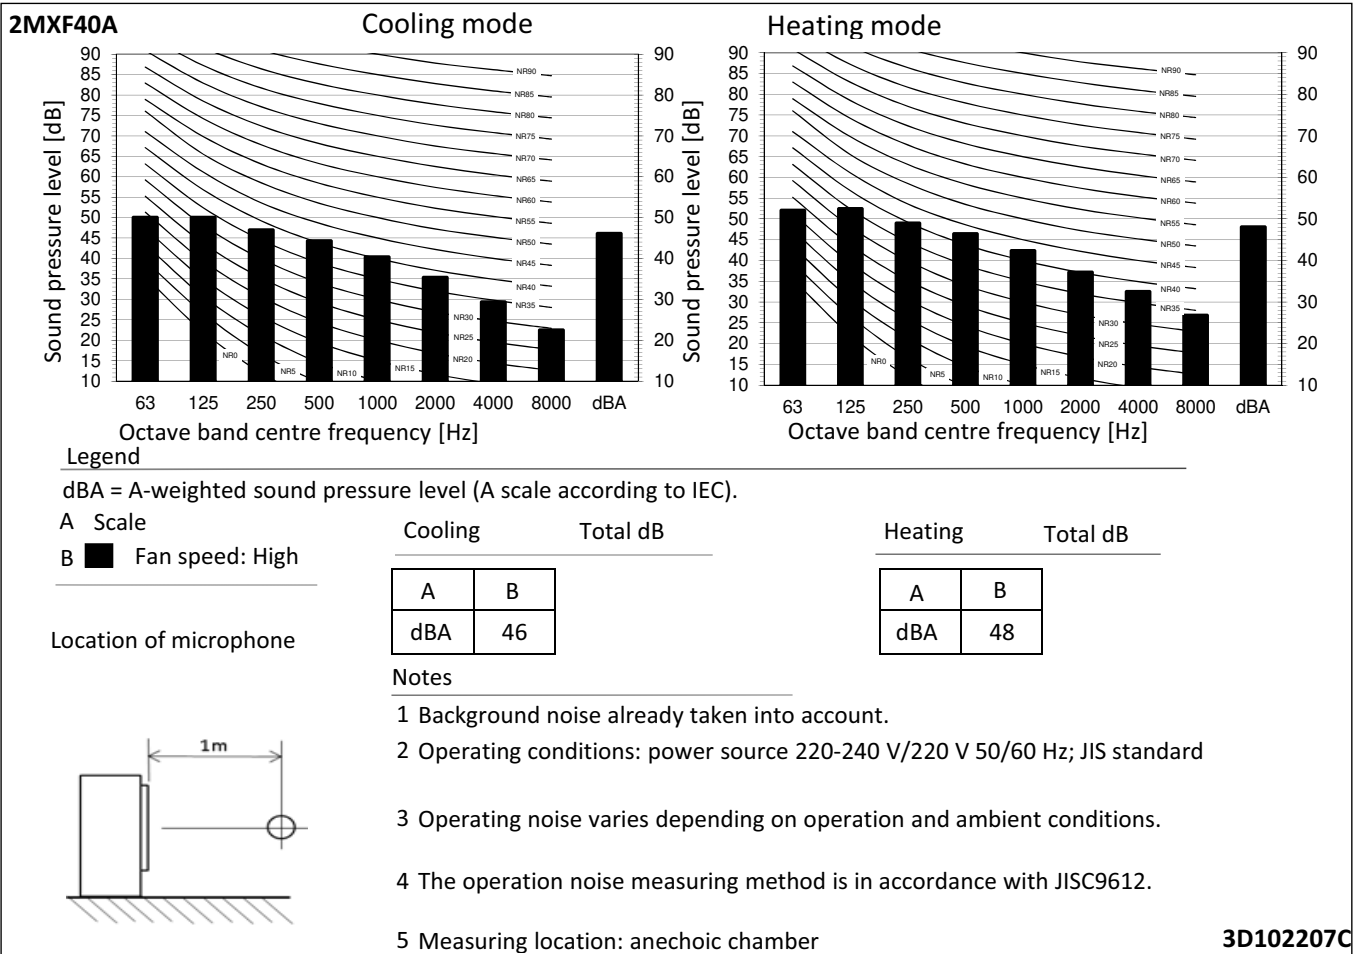

11 Operation range

11 - 1 Operation Range

2MXF-A

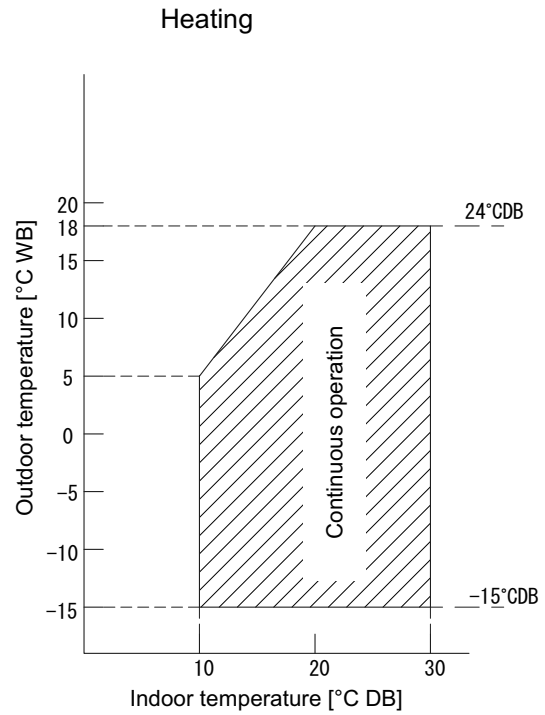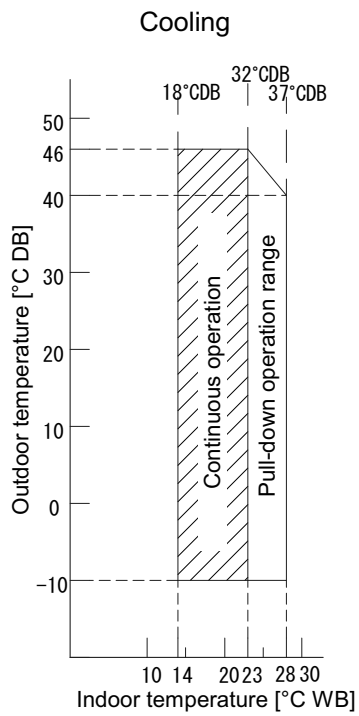



Notes

- The graph is based on the following conditions.
 Corresponding refrigerant piping length: 5 m
 Level difference: 0 m
 Air flow rate: High

3D101376D



Daikin Europe N.V. Naamloze Vennootschap - Zandvoordestraat 300, B-8400 Oostende - Belgium - www.daikin.eu - BE 0412 120 336 - RPR Oostende



EEDEN20A 02/20



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.