



# Air Conditioning Technical Data RXF-D





---

# TABLE OF CONTENTS

# RXF-D

---

1	<b>Features</b>	4
	RXF-D	4
2	<b>Specifications</b>	5
3	<b>Electrical data</b>	12
4	<b>Capacity tables</b>	13
	Cooling Capacity Tables	13
5	<b>Dimensional drawings</b>	17
6	<b>Centre of gravity</b>	18
7	<b>Piping diagrams</b>	20
8	<b>Wiring diagrams</b>	22
	Wiring Diagrams - Single Phase	22
9	<b>Sound data</b>	25
	Sound Pressure Spectrum	25
10	<b>Operation range</b>	29

# 1 Features

## 1 - 1 RXF-D

- › Daikin outdoor units are neat, sturdy and can easily be mounted on a roof or terrace or simply placed against an outside wall
- › Daikin outdoor units are equipped with an anti-corrosion treated heat exchanger (blue fin) which ensures greater resistance to the most severe weather conditions
- › Outdoor units for pair application
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency

**1**

Inverter

## 2 Specifications

### 2 - 1 Specifications

Technical specifications			FTXF20D + RXF20D	FTXF25D + RXF25D	FTXF35D + RXF35D	FTXF42D + RXF42D
Indoor unit			FTXF20D5V1B	FTXF25D5V1B	FTXF35D5V1B	FTXF42D5V1B
Outdoor unit			RXF20D5V1B	RXF25D5V1B	RXF35D5V1B	RXF42D5V1B
Cooling capacity	Min.	kW	1.3			1.4
	Min.	Btu/h	4,400.0			4,800.0
	Min.	kcal/h	1,118.0			1,204.0
	Nom.	kW	2.00	2.50	3.30	4.20
	Nom.	Btu/h	6,800.0	8,500.0	11,300	14,300
	Nom.	kcal/h	1,720.0	2,150.0	2,838.0	3,611.0
	Max.	kW	2.4	2.8	3.8	4.3
	Max.	Btu/h	8,200.0	9,600.0	12,800.0	14,700.0
	Max.	kcal/h	2,064.0	2,408.0	3,224.0	3,697.0
	Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.	kcal/h	-		
Max.		kcal/h	-			-
Heating capacity	Min.	kW	1.30			1.40
	Min.	Btu/h	4,400.0			4,800.0
	Min.	kcal/h	1,118.0			1,204.0
	Nom.	kW	2.40	2.80	3.50	4.60
	Nom.	Btu/h	8,200.0	9,600.0	11,900	15,700
	Nom.	kcal/h	2,064.0	2,408.0	3,010.0	3,955.0
	Max.	kW	3.30	3.70	4.40	5.00
	Max.	Btu/h	11,300.0	12,600.0	15,000.0	17,100.0
	Max.	kcal/h	2,838.0	3,181.0	3,783.0	4,300.0
	Power input	Cooling	Min.	kW		
Nom.			kW			0.772
Max.			kW			1.00
Heating		Min.	kW			1.27
		Nom.	kW			0.750
		Max.	kW			1.11
Nominal efficiency	EER	3.38			3.24	3.30
	COP	3.75			3.73	3.72
Energy labeling Directive	Cooling				A	
	Heating				A	
Space cooling	Energy efficiency class					A++
	Capacity Pdesign	kW	2.00	2.50	3.50	4.20
	SEER				6.50	
	Annual energy consumption	kWh/a	108	135	188	226
Space heating (Average climate)	Capacity Pdesign	kW	2.20	2.40	2.60	3.30
	Energy efficiency class					A+
	SCOP/A				4.11	4.30
	SCOPnet/A				4.15	4.16
	Pdh Heating capacity at -10°	kW	1.91	2.00	2.22	2.61
	Annual energy consumption	kWh/a	749	818	885	1,075
	Required back up heating cap at design conditions	kW	0.290	0.400	0.380	0.690
	Space heating (Warm climate)	Capacity Pdesignh	kW	1.18	1.29	1.40
Energy efficiency class		A+++			A++	
SCOP		5.20			5.00	4.87
SCOPnet		5.28			5.26	5.13
Annual energy consumption		kWh/a	321	361	402	466
Required back up heating cap at design conditions		kW				0.00
Space cooling	A Condi- tion (35°C - 27/19)	Pdc	kW			2.00
		EERd	3.35			3.30
	B Condi- tion (30°C - 27/19)	Pdc	kW			1.47
		EERd	5.10			4.91
	C Condi- tion (25°C - 27/19)	Pdc	kW			0.288
		EERd	0.950			1.18
	D Condi- tion (20°C - 27/19)	Pdc	kW			8.52
		EERd	0.112			0.140
	Power input		kW			0.107

## 2 Specifications

### 2 - 1 Specifications

Technical specifications					FTXF20D + RXF20D	FTXF25D + RXF25D	FTXF35D + RXF35D	FTXF42D + RXF42D		
Space heating (Average climate)	TOL	Tol (temperature operating limit) °C			-15					
		Pd <sub>h</sub> (declared heating cap) kW			1.71		2.05		2.10	
		COP <sub>d</sub> (declared COP)			2.47		2.02		2.06	
		Power input kW			0.692		1.01		1.02	
	TBivalent	Tb <sub>iv</sub> (bivalent temperature) °C			-7.0					
		Pd <sub>h</sub> (declared heating cap) kW			1.95	2.12	2.30	2.92		
		COP <sub>d</sub> (declared COP)			2.78		2.75		2.70	
		Power input kW			0.701	0.771	0.875	1.08		
	A Con- dition (-7°C)	Pd <sub>h</sub> (declared heating cap) kW			1.95	2.12	2.30	2.92		
		COP <sub>d</sub> (declared COP)			2.78		2.75		2.70	
		Power input kW			0.701	0.771	0.875	1.08		
	B Condi- tion (2°C)	Pd <sub>h</sub> (declared heating cap) kW			1.18	1.29	1.40	1.78		
COP <sub>d</sub> (declared COP)			4.11		4.14		4.36			
Space heating (Average climate)	B Condi- tion (2°C)	Power input kW			0.287	0.314	0.338	0.408		
		Pd <sub>h</sub> (declared heating cap) kW			0.900		1.00		1.14	
	C Condi- tion (7°C)	COP <sub>d</sub> (declared COP)			5.15		5.40		5.50	
		Power input kW			0.175	0.185	0.207			
		Pd <sub>h</sub> (declared heating cap) kW			1.00	0.700	1.10			
	D Con- dition (12°C)	COP <sub>d</sub> (declared COP)			6.57		5.80		7.10	
		Power input kW			0.152	0.121	0.155			
	Space heating (Warm climate)	TOL	Tol (temperature operating limit) °C			-15				
			Pd <sub>h</sub> (declared heating cap) kW			1.71		2.05		2.10
			COP <sub>d</sub> (declared COP)			2.47		2.02		2.06
Power input kW			0.692		1.01		1.02			
TBivalent		Tb <sub>iv</sub> (bivalent temperature) °C			2					
		Pd <sub>h</sub> (declared heating cap) kW			1.18	1.29	1.40	1.78		
		COP <sub>d</sub> (declared COP)			4.17		4.13		4.36	
		Power input kW			0.283	0.314	0.339	0.408		
B Condi- tion (2°C)		Pd <sub>h</sub> (declared heating cap) kW			1.18	1.29	1.40	1.78		
		COP <sub>d</sub> (declared COP)			4.17		4.14		4.36	
		Power input kW			0.283	0.314	0.338	0.408		
C Condi- tion (7°C)		Pd <sub>h</sub> (declared heating cap) kW			0.900		1.00		1.14	
		COP <sub>d</sub> (declared COP)			5.08	5.15	5.40	5.50		
		Power input kW			0.177	0.175	0.185	0.207		
D Con- dition (12°C)		Pd <sub>h</sub> (declared heating cap) kW			7.06	6.57	5.80	7.10		
		COP <sub>d</sub> (declared COP)			7.06		5.80		7.10	
Power input kW			0.142	0.152	0.121	0.155				
Power consump- tion in other than active mode		Crank- case heater mode	PCK W			0.00				
	Off mode POFF W			1.00						
	Standby mode	Cooling PSB W			1.00					
		Heating PSB W			1.0					
	Thermo- stat-off mode	PTO	Cooling W			23	24	29	40	
			Heating W			23		29		40
Cooling	Cdc (Degradation cooling)			0.25						
Heating	Cdh (Degradation heating)			0.25						
Cooling function included					Yes					
Heating function included					Yes					
Average climate included					Yes					
Cold season included					No					
Warm season included					Yes					
Ecolabel logo					No	Yes		No		
Eurovent	Sound power level outdoor	Cooling	Nom.	dBA	60		61			
					53	54	59			
	Piping length	Cooling	Measuring con- dition	m	5.0					

Technical specifications					FTXF50D + RXF50D	FTXF60D + RXF60D	FTXF71D + RXF71D
Indoor unit		FTXF50D2V1B			FTXF60D2V1B		FTXF71D2V1B
Outdoor unit		RXF50D5V1B			RXF60D5V1B		RXF71D5V1B

## 2 Specifications

### 2 - 1 Specifications

Technical specifications			FTXF50D + RXF50D	FTXF60D + RXF60D	FTXF71D + RXF71D	
Cooling capacity	Min.	kW	1.70		2.30	
	Min.	Btu/h	5,800		7,800	
	Min.	kcal/h	1,462		1,978	
	Nom.	kW	5.00	6.00	7.10	
	Nom.	Btu/h	17,100	20,500	24,200	
	Nom.	kcal/h	4,299	5,159	6,105	
	Max.	kW	6.00	7.00	7.30	
	Max.	Btu/h	20,500	23,900	24,900	
	Max.	kcal/h	5,159	6,019	6,277	
Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.	kcal/h	-			
	Max.	kcal/h	-			
Heating capacity	Min.	kW	1.70		2.30	
	Min.	Btu/h	5,800		7,800	
	Min.	kcal/h	1,500		2,000	
	Nom.	kW	6.00	6.40	8.20	
	Nom.	Btu/h	20,500	21,800	28,000	
	Nom.	kcal/h	5,159	5,503	7,051	
	Max.	kW	7.70	8.00	9.00	
	Max.	Btu/h	26,300	27,300	30,700	
	Max.	kcal/h	6,621	6,879	7,739	
Power input	Cooling Nom.	kW	1.50	1.85	2.77	
	Heating Nom.	kW	1.62	1.63	2.21	
Nominal efficiency	EER		3.33	3.25	2.56	
	COP		3.71	3.93	3.15	
	Annual energy consumption	kWh	751	923	1,387	
	Energy labeling Directive	Cooling Heating	A		E	
Space cooling	Energy efficiency class		A++		A	
	Capacity Pdesign	kW	5.00	6.00	7.10	
	SEER		6.21	6.15	5.15	
	Annual energy consumption	kWh/a	282	342	483	
Space heating (Average climate)	Capacity Pdesign	kW	4.60	4.80	6.20	
	Energy efficiency class		A+		A	
	SCOP/A		4.06		3.81	
Space heating (Average climate)	SCOPnet/A		4.09		3.84	
	Pdh Heating capacity at -10°	kW	4.07	4.24	5.02	
	Annual energy consumption	kWh/a	1,585	1,654	2,275	
	Required back up heating cap at design conditions	kW	0.53	0.56	1.18	
Space heating (Warm climate)	Capacity Pdesignh	kW	2.48	2.59	3.34	
	Energy efficiency class				A+++	
	SCOP		5.31	5.17	5.23	
	SCOPnet		5.39	5.24	5.29	
	Annual energy consumption	kWh/a	654	702	894	
	Required back up heating cap at design conditions	kW		0.00		
Space cooling	A Condi- tion (35°C - 27/19)	Pdc EERd Power input	kW	5.00 3.33 1.50	6.00 3.25 1.85	7.10 2.56 2.77
	B Condi- tion (30°C - 27/19)	Pdc EERd Power input	kW	3.69 4.67 0.79	4.43 4.17 1.06	5.24 3.98 1.32
	C Condi- tion (25°C - 27/19)	Pdc EERd Power input	kW	2.37 6.92 0.34	2.85 7.21 0.40	3.37 6.14 0.55
	D Condi- tion (20°C - 27/19)	Pdc EERd Power input	kW	2.12 11.68 0.18	2.39 12.05 0.20	2.60 8.11 0.32

## 2 Specifications

### 2 - 1 Specifications

2

Technical specifications				FTXF50D + RXF50D	FTXF60D + RXF60D	FTXF71D + RXF71D	
Space heating (Average climate)	TOL	Tol (temperature operating limit) °C		-15			
		Pdh (declared heating cap) kW	4.07	4.22	4.24		
		COPd (declared COP)	2.06	2.33	2.24		
		Power input kW	1.98	1.81	1.89		
	TBivalent	Tbiv (bivalent temperature) °C		-7			
		Pdh (declared heating cap) kW	4.07	4.25	5.49		
		COPd (declared COP)	2.71	2.22			
		Power input kW	1.50	1.91	2.47		
	A Con- dition (-7°C)	Pdh (declared heating cap) kW		4.07	4.25	5.49	
		COPd (declared COP)		2.71	2.22		
		Power input kW		1.50	1.91	2.47	
	B Condi- tion (2°C)	Pdh (declared heating cap) kW		2.48	2.59	3.34	
COPd (declared COP)		3.98	4.28	3.91			
Power input kW		0.62	0.61	0.85			
C Condi- tion (7°C)	Pdh (declared heating cap) kW		1.60	1.67	2.15		
	COPd (declared COP)		5.13	5.24	4.72		
	Power input kW		0.31	0.32	0.46		
Space heating (Average climate)	D Con- dition (12°C)	Pdh (declared heating cap) kW		1.79	2.03	1.55	
		COPd (declared COP)		6.91	6.41	6.74	
		Power input kW		0.26	0.32	0.23	
Space heating (Warm climate)	TOL	Tol (temperature operating limit) °C		-15			
		Pdh (declared heating cap) kW	4.07	4.22	4.24		
		COPd (declared COP)	2.06	2.33	2.24		
		Power input kW	1.98	1.81	1.89		
	TBivalent	Tbiv (bivalent temperature) °C		2			
		Pdh (declared heating cap) kW	2.48	2.59	3.34		
		COPd (declared COP)	3.98	4.28	3.91		
		Power input kW	0.62	0.61	0.85		
	B Condi- tion (2°C)	Pdh (declared heating cap) kW		2.48	2.59	3.34	
		COPd (declared COP)		3.98	4.28	3.91	
		Power input kW		0.62	0.61	0.85	
	C Condi- tion (7°C)	Pdh (declared heating cap) kW		1.60	1.67	2.15	
		COPd (declared COP)		5.13	5.24	4.72	
		Power input kW		0.31	0.32	0.46	
	D Con- dition (12°C)	Pdh (declared heating cap) kW		1.79	2.03	1.55	
		COPd (declared COP)		6.91	6.41	6.74	
		Power input kW		0.26	0.32	0.23	
	Power consump- tion in other than active mode	Crank- case heater mode	PCK W		0		
Off mode POFF W			1				
Standby mode		Cooling PSB W	1				
		Heating PSB W	1				
Thermo- stat-off mode		PTO Cooling W	12		14		
		PTO Heating W	13		14		
Cooling	Cdc (Degradation cooling)			0.25			
Heating	Cdh (Degradation heating)			0.25			
Cooling function included				Yes			
Heating function included				Yes			
Average climate included				Yes			
Cold season included				No			
Warm season included				Yes			
Eurovent	Sound power level outdoor	Cooling	Nom.	dBa	61	63	66
		Cooling	Nom.	dBa	59	60	62
Eurovent	Piping length	Cooling	Measuring con- dition	m	5.00		

Electrical specifications				FTXF20D + RXF20D	FTXF25D + RXF25D	FTXF35D + RXF35D	FTXF42D + RXF42D	FTXF50D + RXF50D	FTXF60D + RXF60D
Power factor	Nominal	Cooling	%					94.60	99.10
		Heating	%					96.30	98.30



## 2 Specifications

### 2 - 1 Specifications

Electrical specifications				FTXF20D + RXF20D	FTXF25D + RXF25D	FTXF35D + RXF35D	FTXF42D + RXF42D	FTXF50D + RXF50D	FTXF60D + RXF60D
Current	Nominal running current (RLA)	Cooling	A			-		6.90	8.10
	Nominal running current (RLA) - 50Hz	Heating	A			-		7.30	7.20
Current - 50Hz	Maximum fuse amps (MFA)		A			-		20.00	

Electrical specifications				FTXF71D + RXF71D					
Power factor	Nominal	Cooling	%						98.80
		Heating	%						98.40
Current	Nominal running current (RLA)	Cooling	A						12.20
		Heating	A						11.50
Current - 50Hz	Maximum fuse amps (MFA)		A						20.00

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. Data for high efficiency series, Eurovent certified |

Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. Data for standard efficiency series |

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

See separate drawing for operation range |

See separate drawing for electrical data

Technical Specifications				RXF20D	RXF25D	RXF35D	RXF42D	
Casing	Colour			Ivory white				
Dimensions	Unit	Height	mm	550				
		Width	mm	658				
		Depth	mm	275				
	Packed unit	Height	mm	630				
		Width	mm	790				
		Depth	mm	400				
Weight	Unit	kg		24.0		28.0		
	Packed unit	kg		26		30		
Packing	Weight		kg	2				
Heat exchanger	Length			670		647		
	Rows	Quantity		1				
		Fin pitch		mm				
	Stages		Quantity		24			
	Tube type				ø7 Hi-XD			
	Tube material				Copper			
	Fin Type				Waffle Hydrophilic Blue			
	Fan	Type			Propeller			
		Air flow rate	Cooling	High	m <sup>3</sup> /min	27.6	29.0	28.5
				cfm	975	1,024	1,006	
Heating		High	m <sup>3</sup> /min	27.1	28.0	27.5		
	cfm	957	990	971				
Fan motor	Model			DFC04A1VA		ZWA138S28A		
	Insulation grade			Class "E"				
	Output			W		41		
	Speed	Cooling	High	rpm	840	900	900	
			Low	rpm	700			
Heating	High	rpm	870	900	900			
Compressor	Model			1Y078BKAX1P#D		1YC25KXD#D		
	Oil Amount			cm <sup>3</sup>		400		
	Type			Hermetically sealed swing compressor				
	Output			W				
	Oil Type			FW68DA				
Operation range	Cooling	Ambient	Min.	°CDB	-10			
			Max.	°CDB	48			
Operation range	Heating	Ambient	Min.	°CWB	-15			
			°CDB	-15				
			°CWB	18				
			°CDB	24				
Sound power level	Heating	Nom.	dBA	60.0		62.0		
		Cooling	High	dBA	46.0		48.0	
			High	dBA	47.0		48.0	
Refrigerant	Type			R-32				
	Charge			kg		0.450		
	GWP			675.0				

## 2 Specifications

### 2 - 1 Specifications

2

Technical Specifications				RXF20D	RXF25D	RXF35D	RXF42D
Piping connections	Liquid	OD	mm	6			
	Gas	OD	mm	9.50			
	Drain	OD	mm	18			
	Piping length	OU - IU	Max. m	20			
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max. m	12.0			
Capacity control	Method			Variable (inverter)			

Technical Specifications				RXF50D	RXF60D	RXF71D		
Casing	Colour			Ivory white				
Dimensions	Unit	Height	mm	734				
		Width	mm	870				
		Depth	mm	373				
	Packed unit	Height	mm	820				
		Width	mm	1,050				
		Depth	mm	480				
Weight	Unit	kg		46.0	50.0			
	Packed unit	kg		50.0	54.0			
Packing	Weight		kg	4.0				
	Heat exchanger			Length	mm	943	920	
Heat exchanger	Rows	Quantity		1	2			
	Fin pitch			mm	1.4			
	Stages			Quantity	32			
	Passes			Quantity	2.0			
	Tube type			ø7 Hi-XD				
	Fan	Fin			Type			Waffle fin (PE)
		Type			Propeller fan			
Fan	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	43.2	47.8		
			cfm	1,527	1,689			
	Heating	Nom.	m <sup>3</sup> /min	43.2	45.3			
		cfm	1,527	1,600				
Fan motor	Model			D55F-31				
	Output			W	58	81		
	Speed	Cooling	High	rpm	740	760		
			Nom.	rpm	710	740		
			Low	rpm	710	740		
	Heating	High	rpm	710	660			
		Nom.	rpm	710	660			
		Low	rpm	630	660			
Compressor	Model			2YC40JXD#C				
	Oil Amount			cm <sup>3</sup>	650			
	Type			Hermetically sealed swing compressor				
	Output			W	1,300.0			
	Oil Type			FW68DA				
Sound power level	Heating	Nom.		dBa	61	63	65	
		Cooling	Nom.		dBa	47	49	52
Sound pressure level	Heating		Nom.		dBa	49		52
		Refrigerant	Type			R-32		
Charge			kg	0.90	1.15			
GWP			675					
Piping connections	Liquid	OD	mm	6.35				
	Gas	OD	mm	12.7				
	Drain	OD	mm	16				
	Piping length	OU - IU	Max. m	30				
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)			
	Level difference	IU - OU	Max. m	20				
	Heat insulation			Both liquid and gas pipes				
	Capacity control	Method			Variable (inverter)			

Standard accessories: Installation manual;Quantity: 1;

Standard accessories: Drain plug;Quantity: 1;

Standard accessories: Refrigerant charge label;Quantity: 1;

Standard accessories: Multilingual fluorinated greenhouse gases labels;Quantity: 1;

Standard accessories: General safety precautions;Quantity: 1;

Standard accessories: Drain cap (1);Quantity: 6;

Standard accessories: Drain cap (2);Quantity: 3;

## 2 Specifications

### 2 - 1 Specifications

Electrical Specifications			RXF20D	RXF25D	RXF35D	RXF42D	RXF50D	RXF60D	RXF71D
Power supply	Phase					1~			
	Frequency	Hz				50			
	Voltage	V				220-240			
Wiring connections	For power supply	Quantity				3			
		Remark				Earth wire included			
	For connection with indoor	Quantity				4			
		Remark				Earth wire included			
Current - 50Hz	Maximum fuse amps (MFA)	A		16				-	

See separate drawing for operation range |  
 See separate drawing for electrical data |  
 Contains fluorinated greenhouse gases

# 3 Electrical data

## 3 - 1 Electrical Data

3

### ARXF-D RXF20-42D

Unit combination restrictions		Power supply				COMP		OFM		IFM		
Indoor unit	Outdoor unit	Hz	Voltage	Voltage range	MCA	MFA	RHz	RLA	kW	FLA	kW	FLA
FTXF20D5V1B	RXF20D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	8,02	16	39,0	3,2	0,024	0,171	0,029	0,41
		50	230					3,4				
		50	240					3,2				
FTXF25D5V1B	RXF25D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	8,09	16	54,0	3,5	0,033	0,235	0,029	0,41
		50	230					3,6				
		50	240					3,5				
FTXF35D5V1B	RXF35D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	9,30	16	70,0	4,5	0,033	0,235	0,037	0,52
		50	230					4,7				
		50	240					4,5				
FTXF42D5V1B	RXF42D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	9,38	16	78,0	5,5	0,030	0,229	0,050	0,60
		50	230					5,6				
		50	240					5,4				
ATXF20D5V1B	ARXF20D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	8,02	16	39,0	3,2	0,024	0,171	0,029	0,41
		50	230					3,4				
		50	240					3,2				
ATXF25D5V1B	ARXF25D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	8,09	16	54,0	3,5	0,033	0,235	0,029	0,41
		50	230					3,6				
		50	240					3,5				
ATXF35D5V1B	ATXF35D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	9,30	16	70,0	4,5	0,033	0,235	0,037	0,52
		50	230					4,7				
		50	240					4,5				
ATXF42D5V1B	ATXF42D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	9,38	16	78,0	5,5	0,030	0,229	0,050	0,60
		50	230					5,6				
		50	240					5,4				

**Notes**

- 1) The ·RLA· is based on the following conditions.  
Outdoor temperature ·35·°C DB  
Indoor temperature ·27·°C DB / ·19·°C WB
- 2) Select the wire size according to the MCA.
- 3) The maximum allowable voltage that is unbalanced between phases is ·2·%.
- 4) Use a circuit breaker instead of a fuse.

**Symbols**

- MCA: Minimum Circuit Ampere [A]  
MFA: Maximum Fuse Ampere [A]  
RLA: Rated load amps [A]  
OFM: Outdoor fan motor  
IFM: Indoor fan motor  
RHz: Rated operating frequency [Hz]  
FLA: Full Load Ampere [A]  
kW: Fan motor rated output [kW]

3D137925

### RXF50-71D

Unit combination restrictions		Power supply				COMP		OFM		IFM		
Indoor unit	Outdoor unit	Hz	Voltage	Voltage range	MCA	MFA	RHz	RLA	kW	FLA	kW	FLA
FTXF50A2V1B	RXF50B5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	14,5	20	54	7,1	0,068	0,34	0,045	0,43
		50	230					6,9				
		50	240					6,8				
FTXF60A2V1B	RXF60B5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	15,7	20	66	8,2	0,068	0,34	0,049	0,46
		50	230					8,1				
		50	240					8,0				
FTXF71A2V1B	RXF71A5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	15,7	20	84	12,3	0,068	0,34	0,049	0,46
		50	230					12,2				
		50	240					12,1				
ATXF50A2V1B	ARXF50A5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	14,5	20	54	7,1	0,068	0,34	0,045	0,43
		50	230					6,9				
		50	240					6,8				
ATXF60A2V1B	ARXF60A5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	15,7	20	66	8,2	0,068	0,34	0,049	0,46
		50	230					8,1				
		50	240					8,0				
ATXF71A2V1B	ARXF71A5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	15,7	20	84	12,3	0,068	0,34	0,049	0,46
		50	230					12,2				
		50	240					12,1				
FTXF50D2V1B	RXF50D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	14,5	20	54	7,1	0,068	0,34	0,045	0,43
		50	230					6,9				
		50	240					6,8				
FTXF60D2V1B	RXF60D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	15,7	20	66	8,2	0,068	0,34	0,049	0,46
		50	230					8,1				
		50	240					8,0				
FTXF71D2V1B	RXF71D5V1B	50	220	Maximum -50-Hz :264-V Minimum -50-Hz :198-V	15,7	20	84	12,3	0,068	0,34	0,049	0,46
		50	230					12,2				
		50	240					12,1				

**SYMBOLS**

- MCA : Minimum Circuit Ampere [A]  
MFA : Maximum Fuse Ampere [A]  
RLA : Rated load amps [A]  
OFM : Outdoor fan motor  
IFM : Indoor fan motor  
RHz : Rated operating frequency [Hz]  
FLA : Full Load Ampere [A]  
kW : Fan motor rated output [kW]

**NOTES**

1. The RLA is based on the following conditions.
  - Outdoor temperature ·35·°C DB
  - Indoor temperature ·27·°C DB / ·19·°C WB
2. Select the wire size according to the MCA.
3. The maximum allowable voltage that is unbalanced between phases is ·2·%.
4. Use a circuit breaker instead of a fuse.

3D133818A

# 4 Capacity tables

## 4 - 1 Cooling Capacity Tables

### FTXF20D / RXF20D

### ATXF20D / ARXF20D

Cooling · 220-240V 50Hz·

AFR	9,7
BF	0,22

Indoor air temperature [°C WB]	Indoor air temperature [°C DB]	Outdoor air temperature [°C DB]																	
		20			25			30			32			35			40		
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	2,05	1,80	0,48	1,96	1,76	0,52	1,86	1,72	0,56	1,83	1,70	0,57	1,77	1,67	0,59	1,68	1,63	0,63
16	22	2,14	1,77	0,48	2,05	1,73	0,52	1,95	1,69	0,55	1,92	1,68	0,57	1,86	1,65	0,59	1,77	1,61	0,63
18	25	2,23	1,89	0,48	2,14	1,86	0,52	2,05	1,82	0,56	2,01	1,81	0,57	1,95	1,78	0,59	1,86	1,75	0,63
<b>19</b>	<b>27</b>	2,28	2,03	0,48	2,19	2,00	0,52	2,09	1,96	0,56	2,06	1,95	0,57	2,00	1,93	0,59	1,91	1,89	0,63
22	30	2,42	1,97	0,49	2,32	1,94	0,53	2,23	1,91	0,57	2,19	1,90	0,58	2,14	1,88	0,60	2,05	1,85	0,64
24	32	2,51	1,93	0,49	2,42	1,91	0,53	2,32	1,88	0,57	2,29	1,87	0,58	2,23	1,85	0,60	2,14	1,82	0,64

Heating · 220-240V 50Hz·

AFR	10,1
-----	------

Indoor air temperature [°C DB]	Outdoor air temperature [°C DB]											
	-15		-10		-5		0		6		10	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	1,19	0,41	1,43	0,42	1,67	0,44	1,92	0,60	2,56	0,63	2,81	0,65
20	1,12	0,42	1,36	0,43	1,60	0,47	1,84	0,61	2,50	0,64	2,73	0,66
22	1,09	0,42	1,33	0,44	1,57	0,47	1,81	0,61	2,47	0,65	2,69	0,67
24	1,06	0,42	1,30	0,44	1,54	0,48	1,78	0,63	2,43	0,65	2,66	0,67
25	1,04	0,43	1,28	0,44	1,52	0,48	1,76	0,63	2,41	0,66	2,64	0,67
27	1,01	0,43	1,25	0,47	1,49	0,48	1,74	0,63	2,38	0,66	2,61	0,68

Heating capacity at nominal operating frequency, measured according to ·EN 14511·.

Notes

- The capacities are based on the following conditions:  
Corresponding refrigerant piping length: ·5,0· m  
Level difference: ·0· m
- The bold cells indicate the standard conditions.

Symbols

- TC: Total capacity [kW]  
PI: Power input [kW]  
SHC: Sensible heat capacity [kW]  
AFR: Air flow rate [m³/min]  
BF: Bypass factor

3D137908

### FTXF25D / RXF25D

### ATXF25D / ARXF25D

Cooling · 220-240V 50Hz·

AFR	9,9
BF	0,22

Indoor air temperature [°C WB]	Indoor air temperature [°C DB]	Outdoor air temperature [°C DB]																	
		20			25			30			32			35			40		
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	2,56	2,08	0,62	2,44	2,03	0,67	2,33	1,97	0,73	2,28	1,95	0,75	2,21	1,92	0,78	2,10	1,86	0,83
16	22	2,68	2,05	0,61	2,56	1,99	0,67	2,44	1,94	0,72	2,40	1,92	0,75	2,33	1,89	0,78	2,21	1,84	0,84
18	25	2,79	2,17	0,61	2,68	2,12	0,67	2,56	2,07	0,72	2,51	2,06	0,75	2,44	2,03	0,78	2,33	1,98	0,84
<b>19</b>	<b>27</b>	2,85	2,31	0,61	2,73	2,27	0,67	2,62	2,22	0,72	2,57	2,20	0,75	2,50	2,18	0,78	2,38	2,13	0,84
22	30	3,02	2,24	0,63	2,91	2,20	0,68	2,79	2,16	0,74	2,74	2,14	0,76	2,67	2,12	0,79	2,56	2,08	0,84
24	32	3,14	2,19	0,62	3,02	2,15	0,67	2,90	2,12	0,73	2,86	2,10	0,76	2,79	2,08	0,79	2,67	2,04	0,85

Heating · 220-240V 50Hz·

AFR	10,3
-----	------

Indoor air temperature [°C DB]	Outdoor air temperature [°C DB]											
	-15		-10		-5		0		6		10	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	1,33	0,50	1,61	0,53	1,87	0,55	2,15	0,72	2,89	0,75	3,15	0,78
20	1,25	0,52	1,52	0,54	1,79	0,56	2,06	0,73	2,80	0,77	3,05	0,79
22	1,22	0,52	1,48	0,54	1,75	0,57	2,03	0,74	2,76	0,77	3,01	0,80
24	1,19	0,53	1,46	0,55	1,73	0,57	2,00	0,75	2,73	0,78	2,98	0,80
25	1,17	0,53	1,44	0,55	1,71	0,57	1,98	0,75	2,71	0,78	2,96	0,81
27	1,14	0,53	1,41	0,56	1,67	0,59	1,95	0,76	2,67	0,79	2,92	0,81

Heating capacity at nominal operating frequency, measured according to ·EN 14511·.

Notes

- The capacities are based on the following conditions:  
Corresponding refrigerant piping length: ·5,0· m  
Level difference: ·0· m
- The bold cells indicate the standard conditions.

Symbols

- TC: Total capacity [kW]  
PI: Power input [kW]  
SHC: Sensible heat capacity [kW]  
AFR: Air flow rate [m³/min]  
BF: Bypass factor

3D137904

# 4 Capacity tables

## 4 - 1 Cooling Capacity Tables

4

**FTXF35D / RXF35D**  
**ATXF35D / ARXF35D**

Cooling · 220-240V 50Hz·

AFR	11,8
BF	0,23

Indoor air temperature [°C WB]	Indoor air temperature [°C DB]	Outdoor air temperature [°C DB]																	
		20			25			30			32			35			40		
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	3,38	2,54	0,76	3,22	2,46	0,84	3,07	2,39	0,91	3,01	2,36	0,94	2,92	2,31	0,99	2,76	2,23	1,06
16	22	3,54	2,50	0,77	3,38	2,42	0,84	3,22	2,35	0,92	3,17	2,33	0,95	3,07	2,28	0,99	2,92	2,22	1,07
18	25	3,69	2,62	0,77	3,54	2,56	0,85	3,38	2,49	0,92	3,32	2,46	0,95	3,22	2,42	1,00	3,07	2,36	1,07
19	27	3,76	2,76	0,77	3,61	2,70	0,85	3,45	2,64	0,92	3,39	2,61	0,95	3,30	2,57	1,00	3,15	2,52	1,08
22	30	3,99	2,67	0,78	3,84	2,61	0,86	3,68	2,56	0,93	3,62	2,54	0,96	3,53	2,50	1,01	3,38	2,44	1,08
24	32	4,14	2,60	0,79	3,99	2,55	0,86	3,84	2,50	0,94	3,77	2,48	0,97	3,68	2,44	1,01	3,53	2,39	1,09

Heating · 220-240V 50Hz·

AFR	11,9
-----	------

Indoor air temperature [°C DB]	Outdoor air temperature [°C WB]											
	-15		-10		-5		0		6		10	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	1,66	0,60	2,00	0,63	2,34	0,67	2,69	0,87	3,62	0,92	3,94	0,95
20	1,57	0,62	1,90	0,65	2,24	0,68	2,58	0,90	3,50	0,94	3,82	0,97
22	1,52	0,63	1,86	0,66	2,20	0,69	2,54	0,90	3,45	0,94	3,77	0,98
24	1,48	0,63	1,82	0,67	2,15	0,70	2,49	0,91	3,40	0,95	3,72	0,99
25	1,46	0,64	1,79	0,67	2,14	0,70	2,48	0,92	3,38	0,96	3,69	0,99
27	1,42	0,64	1,76	0,68	2,09	0,71	2,43	0,92	3,33	0,97	3,65	1,00

Heating capacity at nominal operating frequency, measured according to ·EN 14511·.

Notes

- The capacities are based on the following conditions:  
Corresponding refrigerant piping length: ·5,0· m  
Level difference: ·0· m
- The bold cells indicate the standard conditions.

Symbols

- TC: Total capacity [kW]
- PI: Power input [kW]
- SHC: Sensible heat capacity [kW]
- AFR: Air flow rate [m³/min]
- BF: Bypass factor

**3D137906**

**FTXF42D / RXF42D**  
**ATXF42D / ARXF42D**

Cooling · 220-240V 50Hz·

AFR	12,6
BF	0,23

Indoor air temperature [°C WB]	Indoor air temperature [°C DB]	Outdoor air temperature [°C DB]																	
		20			25			30			32			35			40		
		TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	4,17	3,14	1,04	4,02	3,07	1,11	3,86	3,01	1,19	3,80	2,98	1,22	3,71	2,93	1,26	3,56	2,87	1,34
16	22	4,38	3,09	1,04	4,22	3,02	1,11	4,07	2,97	1,19	4,00	2,94	1,22	3,91	2,90	1,26	3,76	2,85	1,34
18	25	4,57	3,24	1,05	4,41	3,19	1,12	4,26	3,14	1,20	4,19	3,11	1,23	4,10	3,08	1,27	3,94	3,03	1,35
19	27	4,66	3,42	1,05	4,51	3,37	1,12	4,35	3,33	1,20	4,29	3,30	1,23	4,20	3,27	1,27	4,05	3,24	1,35
22	30	4,95	3,31	1,06	4,80	3,26	1,13	4,64	3,23	1,21	4,58	3,21	1,24	4,49	3,18	1,28	4,34	3,13	1,36
24	32	5,14	3,23	1,06	4,99	3,19	1,13	4,83	3,15	1,21	4,77	3,14	1,24	4,68	3,10	1,28	4,53	3,07	1,36

Heating · 220-240V 50Hz·

AFR	12,8
-----	------

Indoor air temperature [°C DB]	Outdoor air temperature [°C WB]											
	-15		-10		-5		0		6		10	
	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15	2,18	0,79	2,63	0,83	3,08	0,88	3,54	1,15	4,76	1,21	5,18	1,25
20	2,06	0,82	2,50	0,86	2,94	0,90	3,39	1,19	4,60	1,24	5,02	1,28
22	2,00	0,83	2,44	0,87	2,89	0,91	3,34	1,19	4,53	1,24	4,95	1,29
24	1,95	0,83	2,39	0,88	2,83	0,92	3,27	1,20	4,47	1,25	4,89	1,31
25	1,92	0,84	2,35	0,88	2,81	0,92	3,26	1,21	4,44	1,27	4,85	1,31
27	1,87	0,84	2,31	0,90	2,75	0,94	3,19	1,21	4,38	1,28	4,80	1,32

Heating capacity at nominal operating frequency, measured according to ·EN 14511·.

Notes

- The capacities are based on the following conditions:  
Corresponding refrigerant piping length: ·5,0· m  
Level difference: ·0· m
- The bold cells indicate the standard conditions.

Symbols

- TC: Total capacity [kW]
- PI: Power input [kW]
- SHC: Sensible heat capacity [kW]
- AFR: Air flow rate [m³/min]
- BF: Bypass factor

**3D137907**

# 4 Capacity tables

## 4 - 1 Cooling Capacity Tables

4

**FTXF50D / RXF50D**

Cooling                      50 Hz            230 V

AFR	16,8
BF	0,27

Indoor temperature		Outdoor temperature [°C DB]																	
EWB	EDB	20			25			30			32			35			40		
°C	°C	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14,0	20	5,12	3,71	1,15	4,89	3,59	1,27	4,66	3,47	1,37	4,56	3,42	1,42	4,42	3,35	1,48	4,19	3,24	1,59
16,0	22	5,35	3,64	1,16	5,12	3,53	1,27	4,89	3,42	1,37	4,79	3,38	1,43	4,65	3,31	1,49	4,42	3,20	1,60
18,0	25	5,58	3,80	1,16	5,35	3,70	1,28	5,12	3,59	1,38	5,02	3,55	1,43	4,88	3,49	1,49	4,65	3,39	1,61
19,0	27	5,70	3,99	1,17	5,47	3,89	1,28	5,23	3,79	1,38	5,14	3,75	1,44	5,00	3,70	1,50	4,77	3,60	1,61
22,0	30	6,04	3,85	1,18	5,81	3,76	1,29	5,58	3,67	1,39	5,49	3,63	1,44	5,35	3,58	1,51	5,11	3,50	1,62
24,0	32	6,27	3,74	1,19	6,04	3,66	1,30	5,81	3,58	1,40	5,72	3,55	1,45	5,58	3,50	1,51	5,34	3,42	1,63

Heating                      50 Hz            230 V

AFR	17,3
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB	°C	-15		-10		-5		0		6		10	
°C	°C	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15,0	20	2,86	1,04	3,43	1,10	4,01	1,15	4,58	1,51	6,21	1,58	6,75	1,64
20,0	22	2,68	1,07	3,26	1,13	3,83	1,18	4,41	1,54	6,00	1,62	6,54	1,67
22,0	25	2,61	1,09	3,19	1,14	3,76	1,19	4,34	1,56	5,92	1,63	6,46	1,69
24,0	27	2,54	1,10	3,12	1,15	3,69	1,20	4,27	1,57	5,83	1,65	6,38	1,70
25,0	30	2,51	1,10	3,08	1,16	3,66	1,21	4,23	1,58	5,79	1,65	6,33	1,71
27,0	32	2,43	1,11	3,01	1,17	3,59	1,22	4,17	1,59	5,71	1,67	6,25	1,72

Symbols

- AFR : Air flow rate [m³/min]
- BF : Bypass factor
- EWB : Entering wet-bulb temperature (°C WB)
- EDB : Entering dry-bulb temperature (°C DB)
- TC : Total capacity [kW]
- SHC : Sensible heat capacity [kW]
- PI : Power input [kW]

Notes

1. The ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. The bold cells indicate the standard conditions.  
Rated operating frequency [Hz]
3. The capacities are based on the following conditions:  
Corresponding refrigerant piping length: 5 m  
Level difference: 0m
4. The air flow rate and bypass factor are mentioned in the table.

**3D113930B**

**FTXF60D / RXF60D**

Cooling                      50 Hz            230 V

AFR	17,3
BF	0,27

Indoor temperature		Outdoor temperature [°C DB]																	
EWB	EDB	20			25			30			32			35			40		
°C	°C	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14,0	20	6,15	4,35	1,42	5,87	4,20	1,55	5,59	4,05	1,69	5,48	4,00	1,74	5,31	3,91	1,83	5,03	3,77	1,97
16,0	22	6,42	4,27	1,43	6,14	4,13	1,56	5,86	4,00	1,70	5,75	3,94	1,76	5,59	3,86	1,83	5,31	3,73	1,97
18,0	25	6,70	4,44	1,44	6,42	4,31	1,58	6,14	4,18	1,71	6,03	4,13	1,77	5,86	4,05	1,85	5,58	3,93	1,98
19,0	27	6,84	4,65	1,44	6,56	4,52	1,58	6,28	4,40	1,71	6,17	4,35	1,77	6,00	4,28	1,85	5,72	4,16	1,99
22,0	30	7,25	4,47	1,45	6,97	4,36	1,59	6,69	4,25	1,72	6,58	4,21	1,78	6,41	4,14	1,86	6,14	4,04	2,00
24,0	32	7,53	4,34	1,46	7,25	4,24	1,60	6,97	4,14	1,73	6,86	4,10	1,79	6,69	4,04	1,87	6,41	3,94	2,00

Heating                      50 Hz            230 V

AFR	17,9
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB	°C	-15		-10		-5		0		6		10	
°C	°C	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15,0	20	3,04	1,05	3,67	1,11	4,28	1,16	4,89	1,51	6,62	1,60	7,20	1,65
20,0	22	2,86	1,08	3,47	1,13	4,09	1,18	4,70	1,55	6,40	1,63	6,98	1,68
22,0	25	2,79	1,09	3,40	1,14	4,01	1,20	4,63	1,56	6,31	1,65	6,89	1,70
24,0	27	2,71	1,10	3,33	1,16	3,94	1,21	4,55	1,58	6,23	1,66	6,80	1,71
25,0	30	2,67	1,11	3,28	1,16	3,90	1,22	4,52	1,59	6,18	1,66	6,76	1,72
27,0	32	2,60	1,11	3,21	1,17	3,82	1,22	4,43	1,60	6,09	1,68	6,67	1,73

Symbols

- AFR : Air flow rate [m³/min]
- BF : Bypass factor
- EWB : Entering wet-bulb temperature (°C WB)
- EDB : Entering dry-bulb temperature (°C DB)
- TC : Total capacity [kW]
- SHC : Sensible heat capacity [kW]
- PI : Power input [kW]

Notes

1. The ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. The bold cells indicate the standard conditions.  
Rated operating frequency [Hz]
3. The capacities are based on the following conditions:  
Corresponding refrigerant piping length: 5 m  
Level difference: 0m
4. The air flow rate and bypass factor are mentioned in the table.

**3D113931B**

# 4 Capacity tables

## 4 - 1 Cooling Capacity Tables

4

### FTXF71D / RXF71D

Cooling 50 Hz 230 V

AFR	17,3
BF	0,27

Indoor temperature		Outdoor temperature [°C DB]																	
EWB	EDB	20			25			30			32			35			40		
°C	°C	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14,0	20	7,28	5,14	2,14	6,95	4,97	2,33	6,61	4,79	2,48	6,48	4,73	2,61	6,28	4,62	2,74	5,95	4,46	2,94
16,0	22	7,60	5,05	2,15	7,27	4,88	2,34	6,93	4,73	2,50	6,80	4,66	2,64	6,61	4,56	2,74	6,28	4,41	2,94
18,0	25	7,93	5,25	2,17	7,60	5,10	2,37	7,27	4,94	2,50	7,14	4,88	2,64	6,93	4,79	2,77	6,60	4,65	2,96
19,0	27	8,09	5,50	2,17	7,76	5,34	2,37	7,43	5,20	2,50	7,30	5,14	2,64	7,10	5,06	2,77	6,77	4,92	2,97
22,0	30	8,58	5,28	2,20	8,25	5,15	2,38	7,92	5,02	2,52	7,79	4,98	2,66	7,58	4,89	2,79	7,27	4,78	2,99
24,0	32	8,91	5,13	2,19	8,58	5,01	2,40	8,25	4,89	2,54	8,12	4,85	2,68	7,92	4,78	2,79	7,58	4,66	2,99

Heating 50 Hz 230 V

AFR	17,9
-----	------

Indoor temperature		Outdoor temperature [°C WB]											
EDB		-15		-10		-5		0		6		10	
°C		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
15,0		3,90	1,79	4,70	1,87	5,48	1,94	6,26	2,02	8,48	2,56	9,22	2,63
20,0		3,67	1,83	4,45	1,90	5,24	1,97	6,03	2,09	8,20	2,60	8,94	2,67
22,0		3,57	1,85	4,36	1,92	5,14	2,00	5,92	2,10	8,08	2,63	8,83	2,70
24,0		3,47	1,86	4,26	1,94	5,05	2,01	5,83	2,13	7,98	2,64	8,72	2,71
25,0		3,42	1,87	4,21	1,96	5,00	2,03	5,79	2,14	7,92	2,66	8,66	2,73
27,0		3,33	1,88	4,11	1,96	4,90	2,03	5,69	2,16	7,80	2,67	8,54	2,74

Symbols

- AFR : Air flow rate [m<sup>3</sup>/min]
- BF : Bypass factor
- EWB : Entering wet-bulb temperature (°C WB)
- EDB : Entering dry-bulb temperature (°C DB)
- TC : Total capacity [kW]
- SHC : Sensible heat capacity [kW]
- PI : Power input [kW]

Notes

1. The ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. The bold cells indicate the standard conditions.  
Rated operating frequency [Hz]
3. The capacities are based on the following conditions:  
Corresponding refrigerant piping length: 5 m  
Level difference: 0m
4. The air flow rate and bypass factor are mentioned in the table.


3D115167A




# 5 Dimensional drawings

## 5 - 1 Dimensional Drawings


ARXF-D  
RXF20-42D

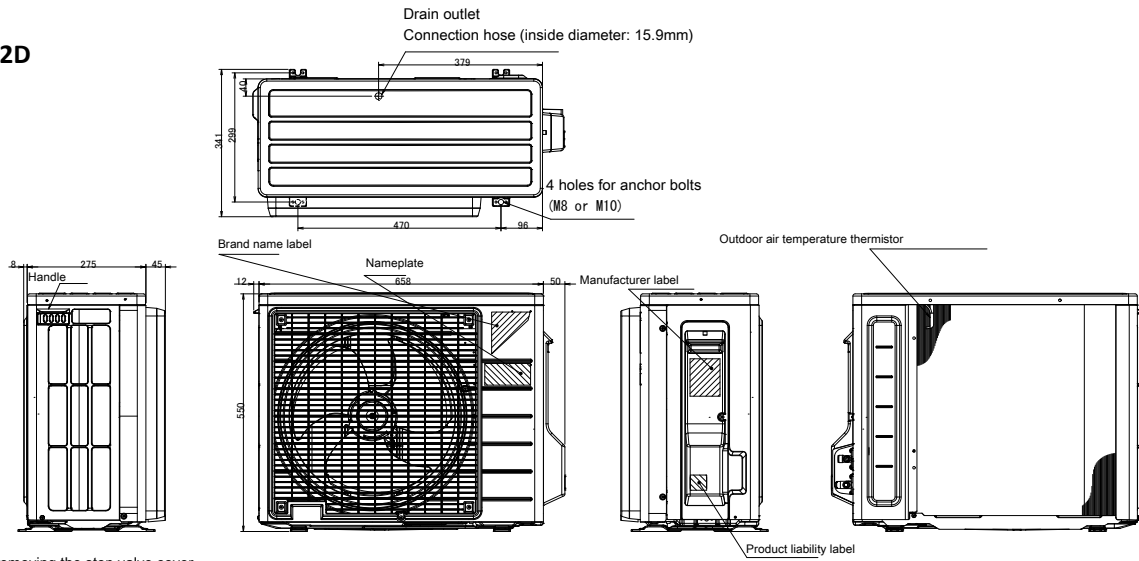

In case of removing the stop valve cover.

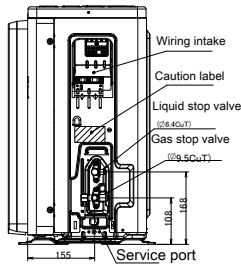


Minimum space for air passage  
Wall height on air outlet side < 1200 mm

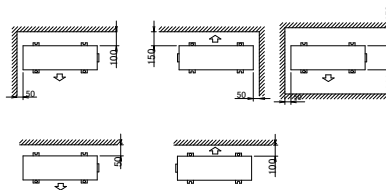


2D113526

RXF50-71D

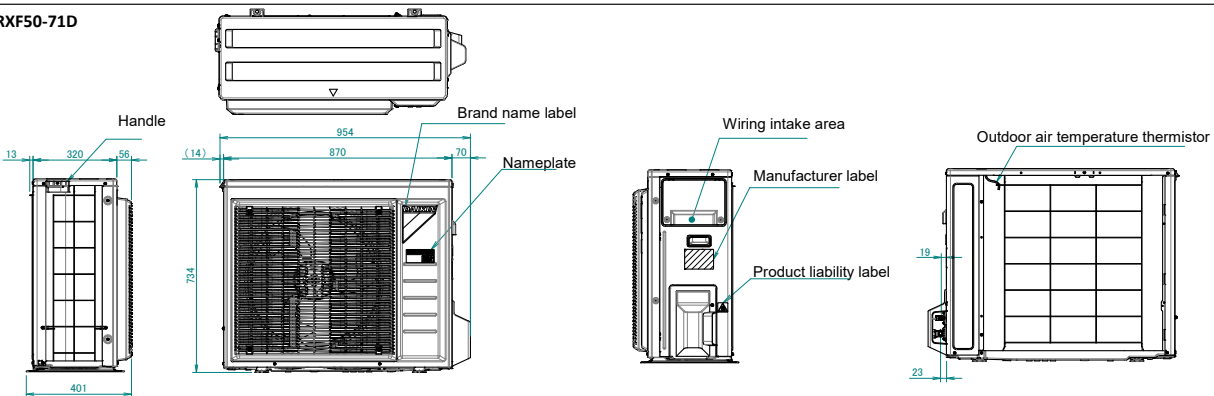


4 holes for anchor bolts  
·M8· or ·M10·

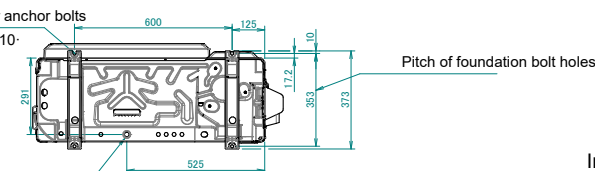


Drain outlet  
Connection hose (inside diameter: ·15.9·mm)

**Minimum space for air passage**

Wall height on air outlet side < 1200 mm

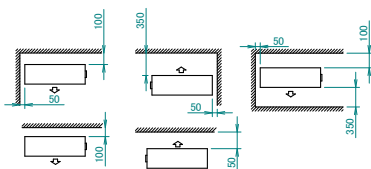

In case of removing the stop valve cover.

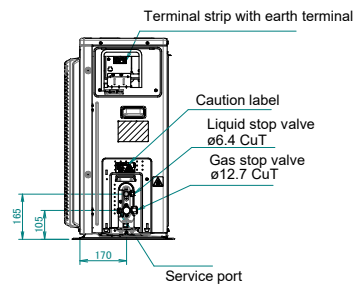



3D114108B

# 6 Centre of gravity

## 6 - 1 Centre of Gravity



6

**ARXF20-35D**  
**RXF20-35D**

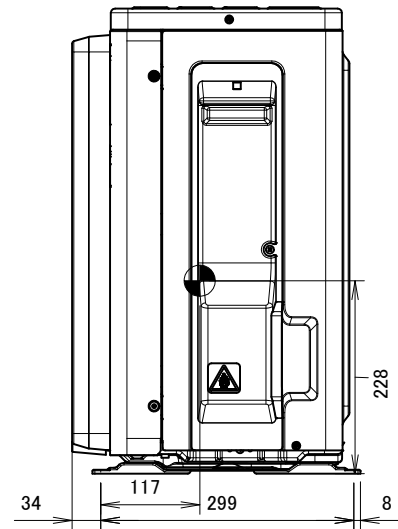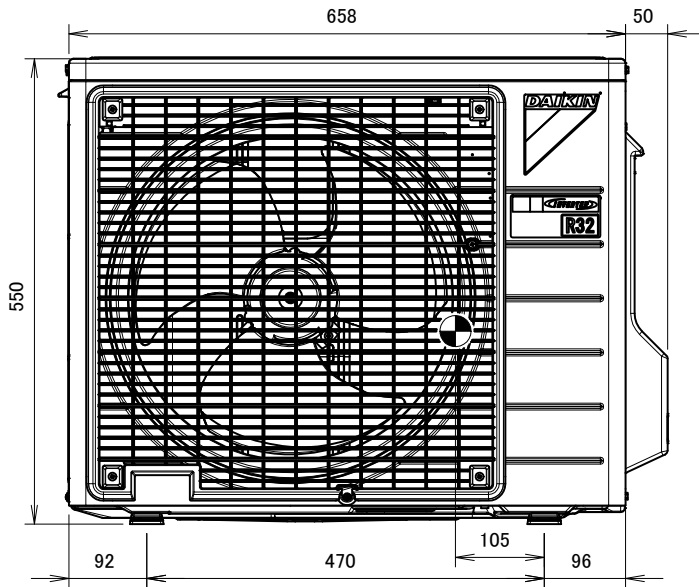

**4D116239**

**ARXF42D**  
**RXF42D**

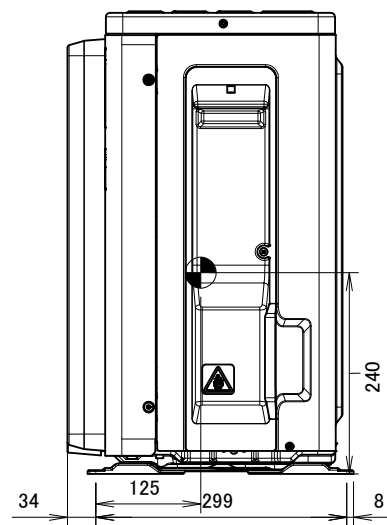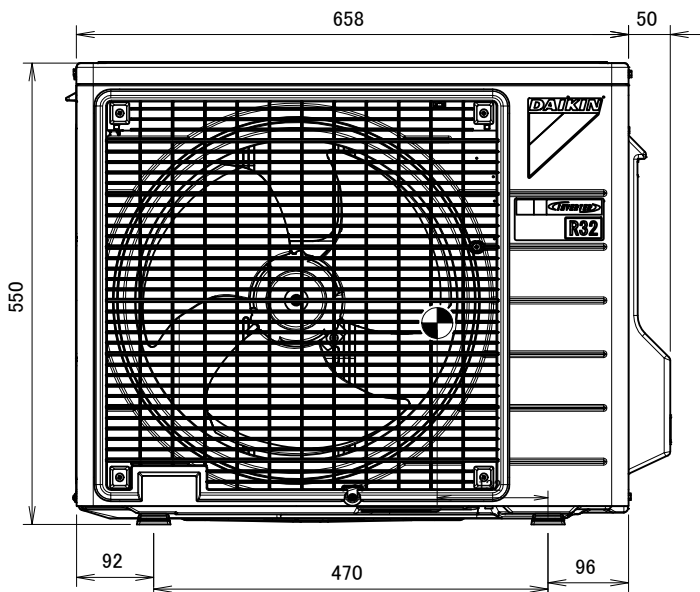


**4D116242**

# 6 Centre of gravity


## 6 - 1 Centre of Gravity

RXF50D

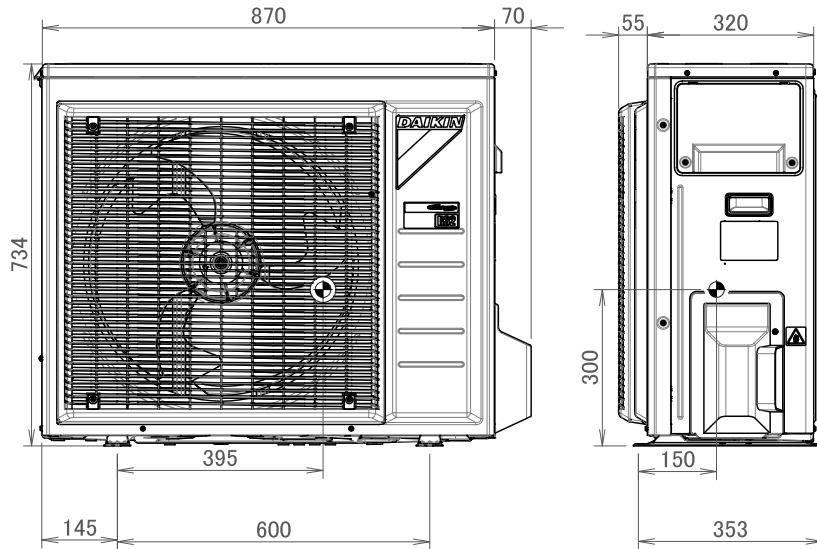

4D114820

RXF60-71D

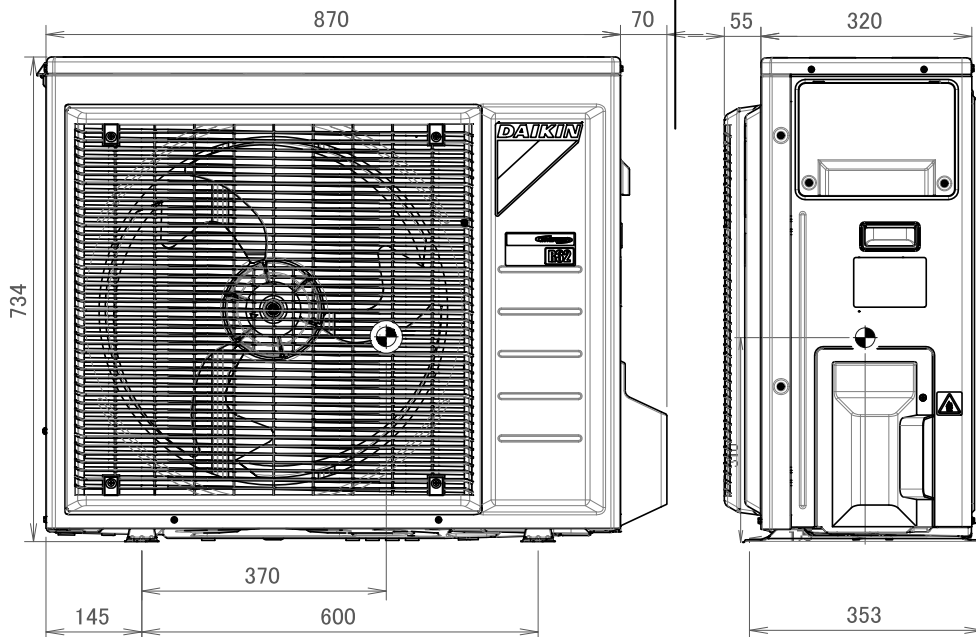

4D114824

# 7 Piping diagrams


## 7-1 Piping Diagrams

7

### ARXF20-35D

### RXF20-35D

### Outdoor unit

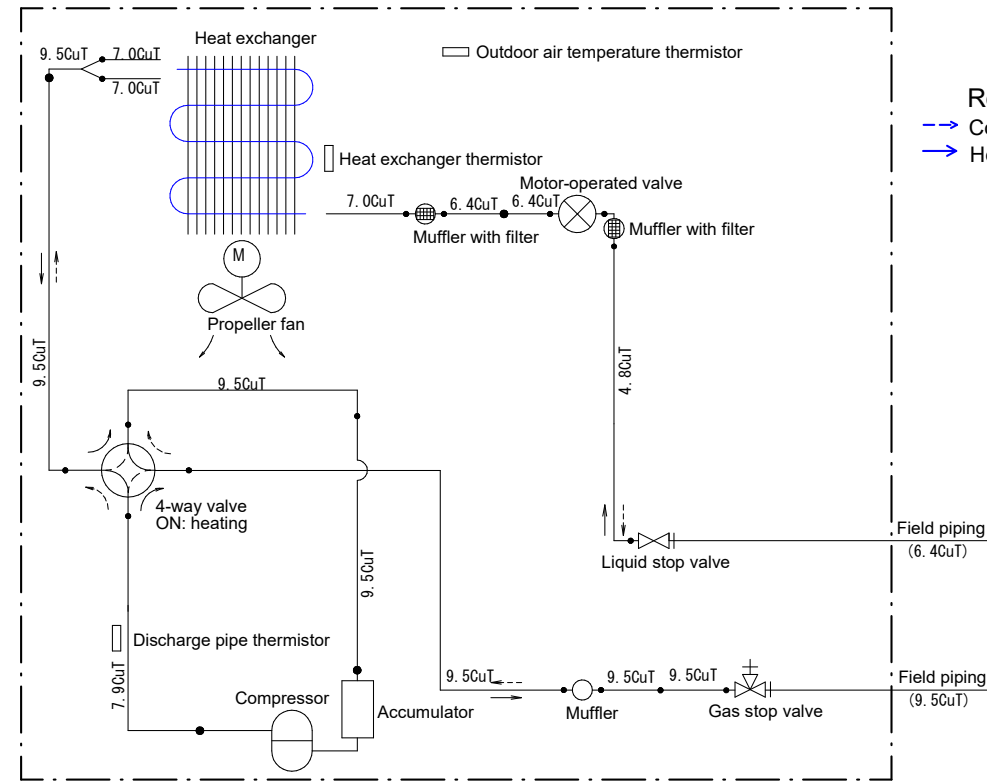


3D136644

### ARXF42D

### RXF42D

### Outdoor unit

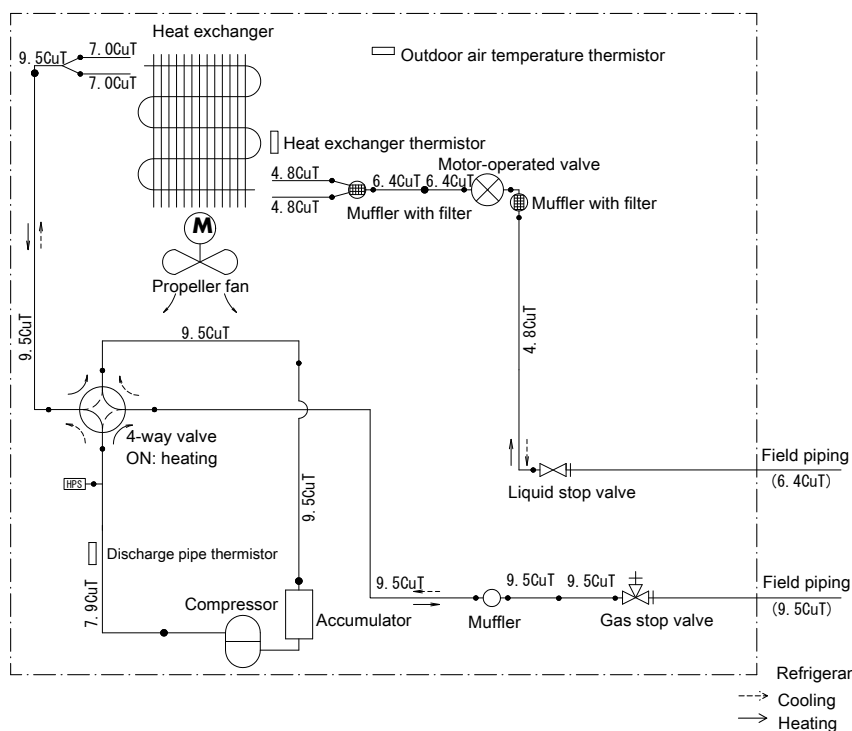


3D114612A

# 7 Piping diagrams

## 7 - 1 Piping Diagrams

### RXF50D


Outdoor unit

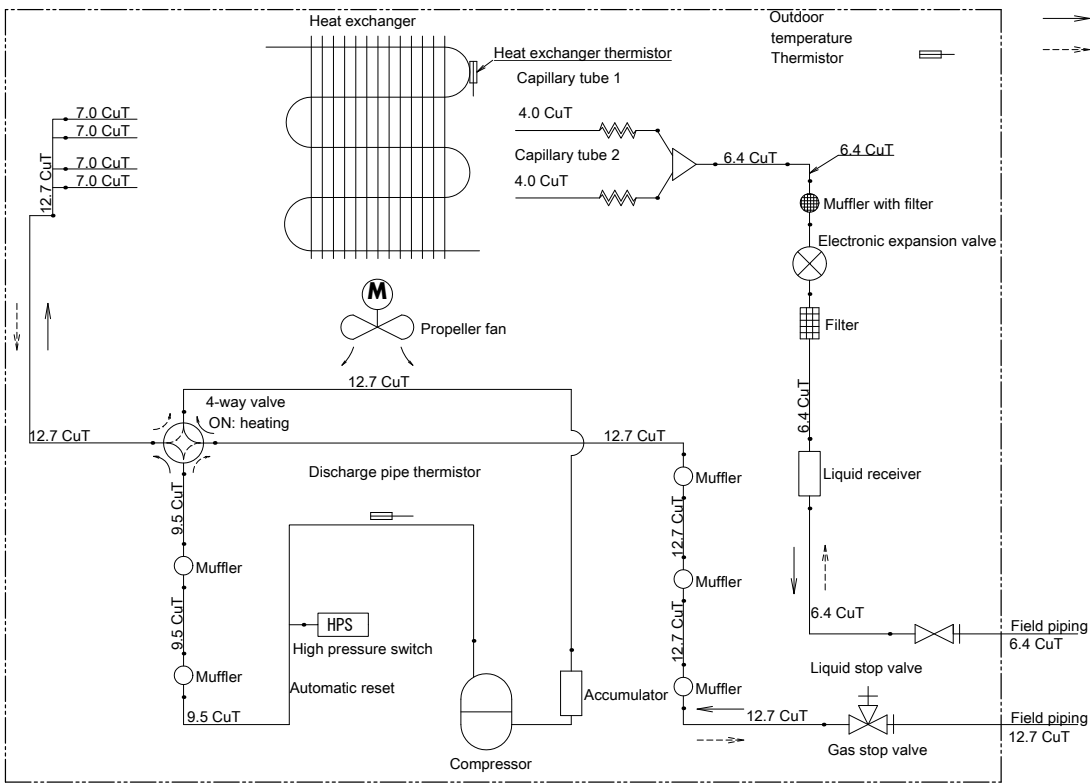

3D114451

### RXF60-71D

Outdoor unit

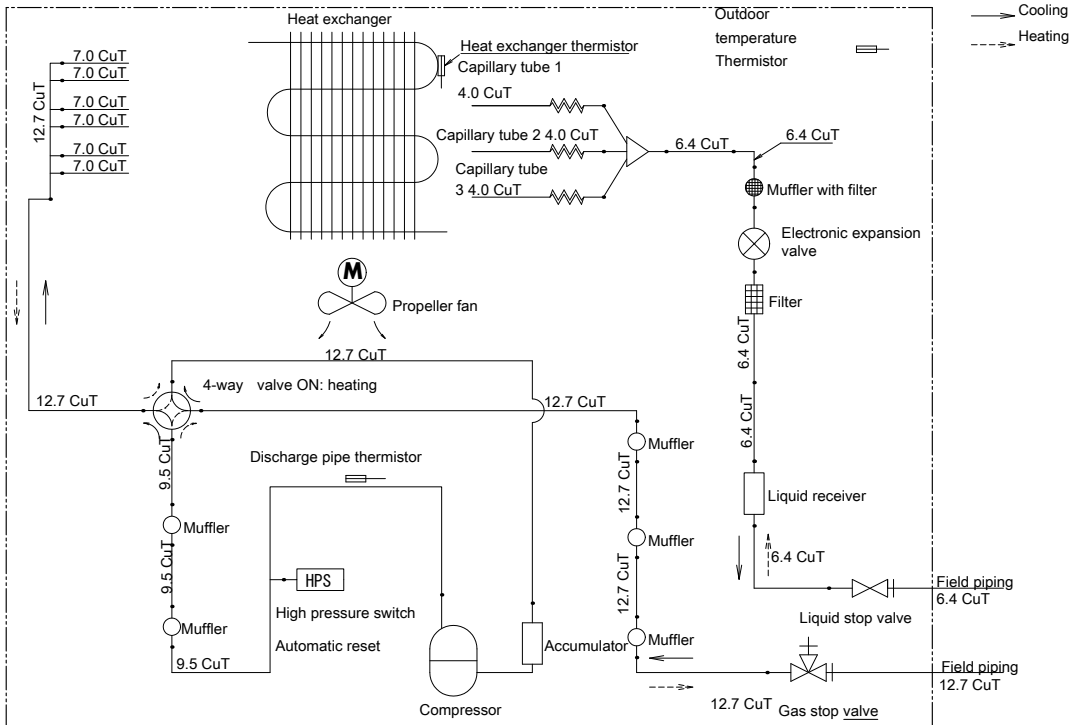

3D114450

# 8 Wiring diagrams

## 8 - 1 Wiring Diagrams - Single Phase

8

**ARXF20-35D**  
**RXF20-35D**

**Wiring diagram**

Field wiring :

**NOTE**  
Refer to the nameplate for the power requirements.

Wire colors

BLK	: Black
WHT	: White
BRN	: Brown
RED	: Red
GRN	: Green
YLW	: Yellow
ORG	: Orange
BLU	: Blue

C1, C2, C400, C405	Capacitor	SA1	Surge arrester
D401, D402	Diode	S, S10, S20, S30, S40, S71, S80, S90, E1, HR1, HR2, X1A	Connector
DB1	Diode bridge	V2, V3	Varistor
FU2, FU3	Fuse	X1M	Terminal strip
IPM1, IPM2	Intelligent power module	Y1S	Reversing solenoid valve coil
L1R	Reactor	PTC1	Thermistor PTC
M1C	Compressor motor	Y1E	Electronic expansion valve coil
M1F	Fan motor	Z1C, Z2C, Z3C	Ferrite core
K30R, K10R, MR4	Magnetic relay	ZF	Noise filter
A1P	Printed circuit board	⊕	Protective earth
PS	Switching power supply	⊥	Earth
Q1L	Overload protector		
R1T, R2T, R3T	Thermistor		

**NOTES**

- Size : length 140 x height 80
- Refer to purchasing specification AS303002, unless otherwise specified.
- This drawing was drawn on cad system.
- Refer to the "cad03919-3d134368-1-wiring-diagram-210406.ai" formatted file unless otherwise specified.

**3D134368**


# 8 Wiring diagrams

## 8 - 1 Wiring Diagrams - Single Phase

ARXF42D

RXF42D

Wiring diagram

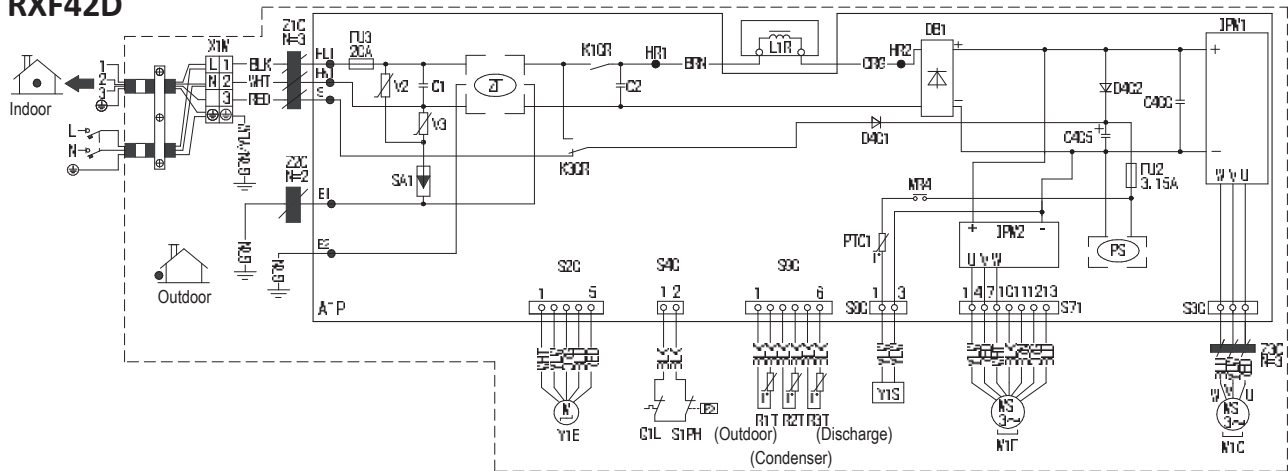

C1, C2, C400, C405	Capacitor
HL1, HN1, S, E1, E2, HR1, HR2	Connection
D401, D402	Diode
DB1	Diode bridge
FU2, FU3	Fuse
IPM1, IPM2	Intelligent power module
L1R	Reactor
M1C	Compressor motor
M1F	Fan motor
K30R, K10R, MR4	Magnetic relay
A1P	Printed circuit board
PS	Switching power supply
Q1L	Overload protector
R1T, R2T, R3T	Thermistor
S1PH	High pressure switch
SA1	Surge arrester
S20, S30, S40, S71, S80, S90	Connector
V2, V3	Varistor
X1M	Terminal strip
Y1S	Reversing solenoid valve coil
PTC1	Thermistor PTC
Y1E	Electronic expansion valve coil
Z1C, Z2C, Z3C	Ferrite core
ZF	Noise filter

BLK:	Black
WHT:	White
BRN:	Brown
RED:	Red
GRN:	Green
YLW:	Yellow
ORG:	Orange
BLU:	Blue

⊕ : Protective earth

⊥ : Earth

▬ : Field wiring

### NOTES

1. Refer to the nameplate for the power requirements.

3D114611A


# 8 Wiring diagrams

## 8 - 1 Wiring Diagrams - Single Phase

8

RXF50-71D

Wiring diagram


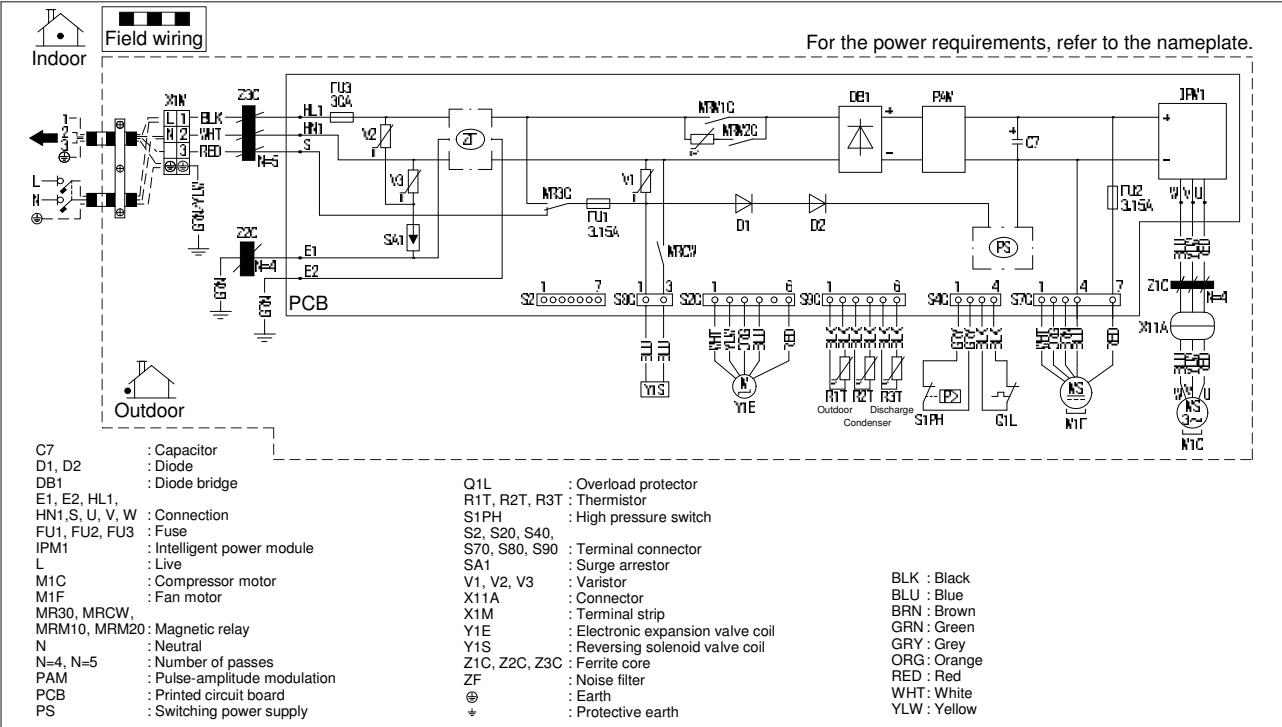


3D114452A



# 9 Sound data



## 9 - 1 Sound Pressure Spectrum

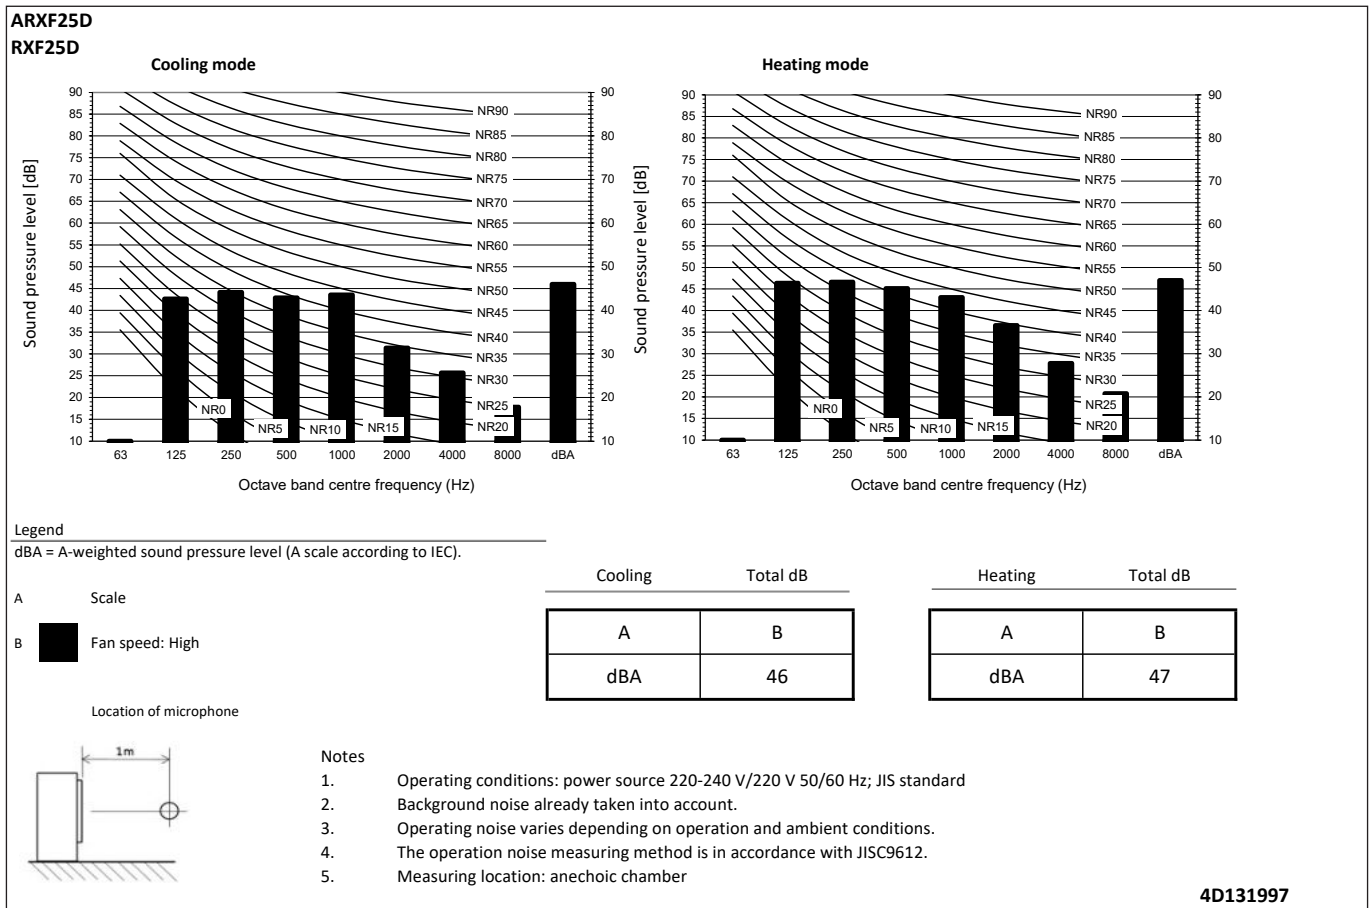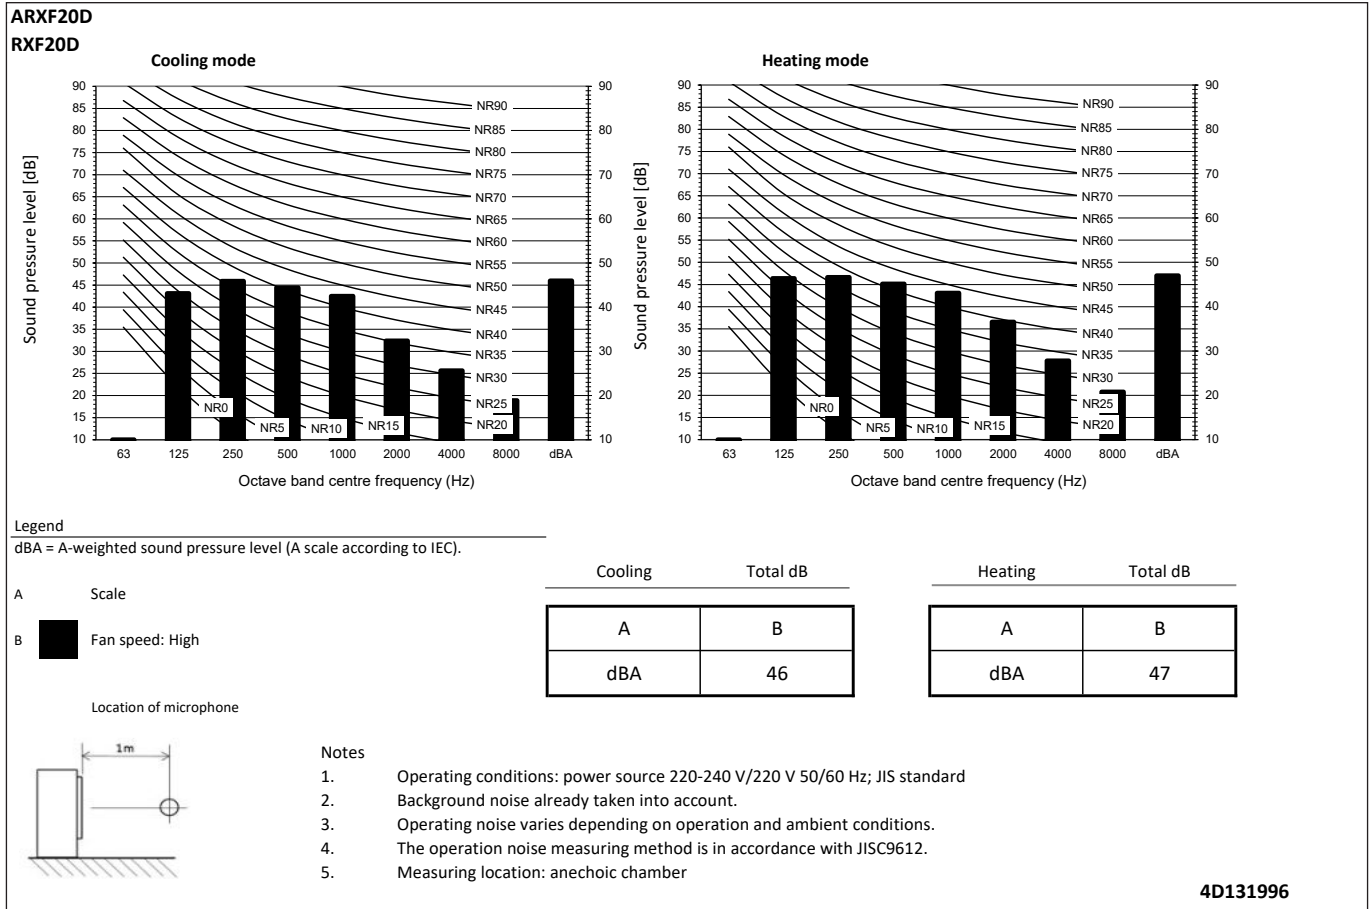

# 9 Sound data

## 9 - 1 Sound Pressure Spectrum


9

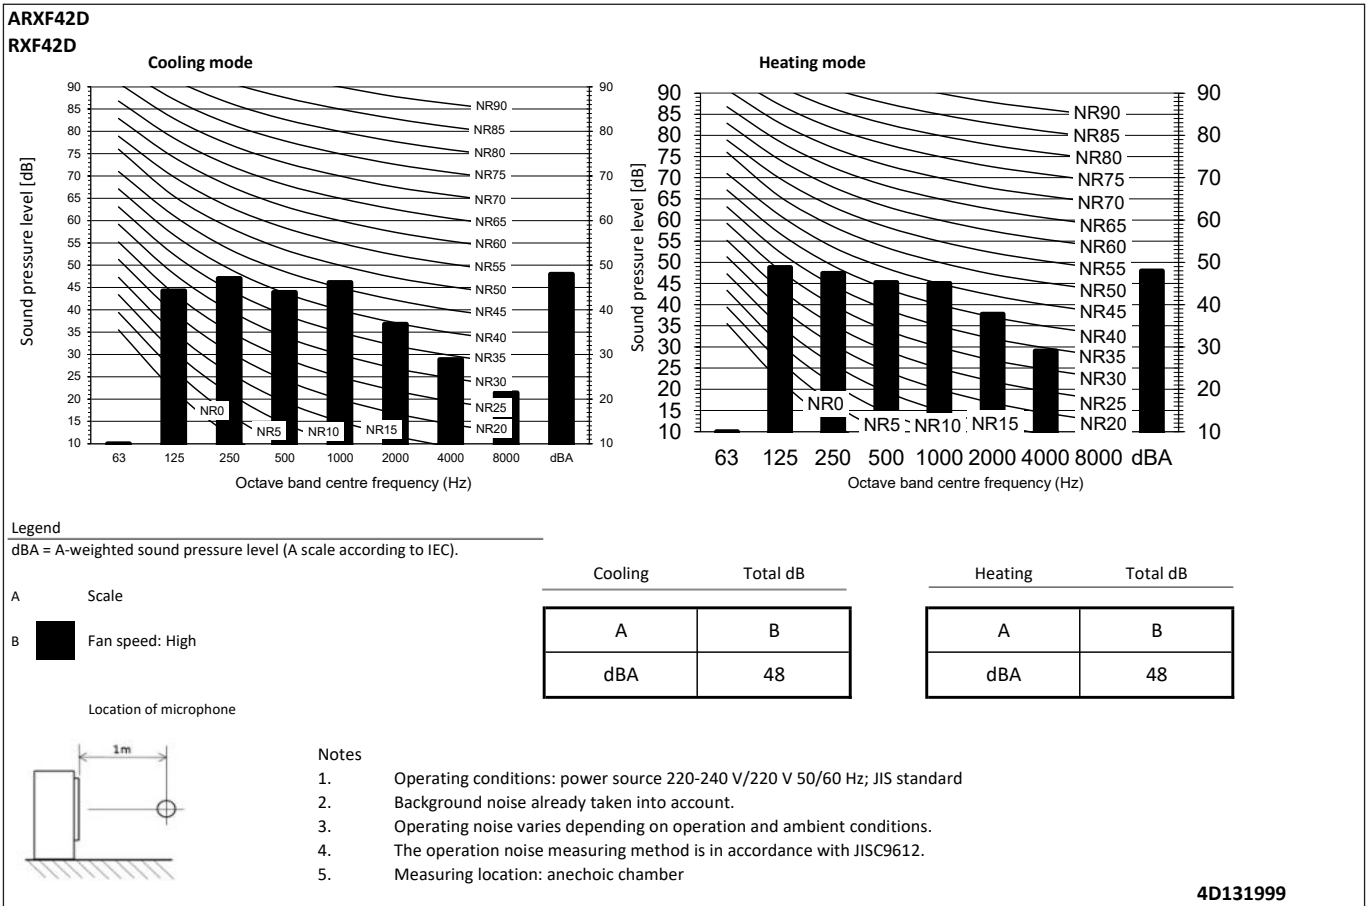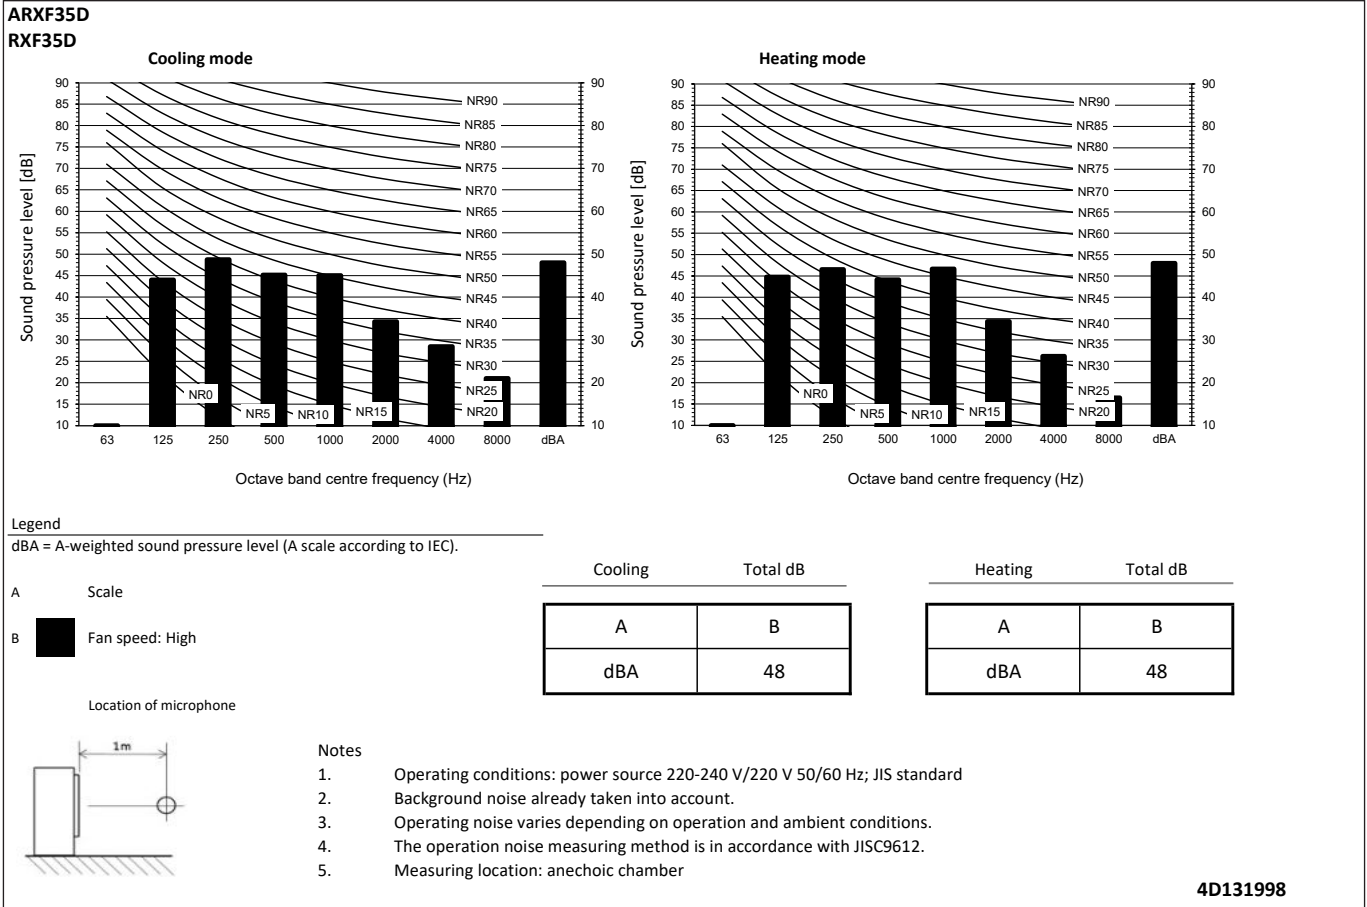

# 9 Sound data

## 9 - 1 Sound Pressure Spectrum

### RXF50D

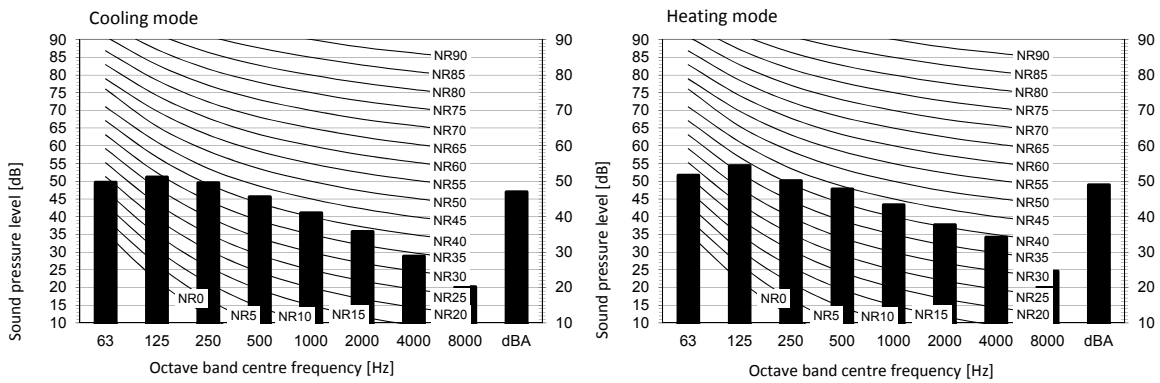

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).


A Scale

B ■ Fan speed: High

Cooling		Total dB
A	B	
dBA		47

Heating		Total dB
A	B	
dBA		49

Location of microphone




Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

3D115241

### RXF60D

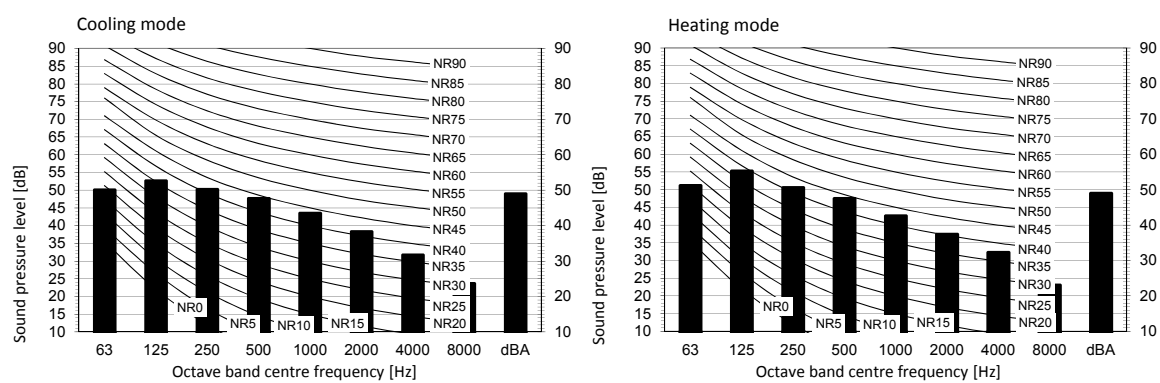

Legend

dBA = A-weighted sound pressure level (A scale according to IEC).


A Scale

B ■ Fan speed: High

Cooling		Total dB
A	B	
dBA		49

Heating		Total dB
A	B	
dBA		49

Location of microphone



Notes

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber


3D115242

# 9 Sound data

## 9 - 1 Sound Pressure Spectrum

9

### RXF71D

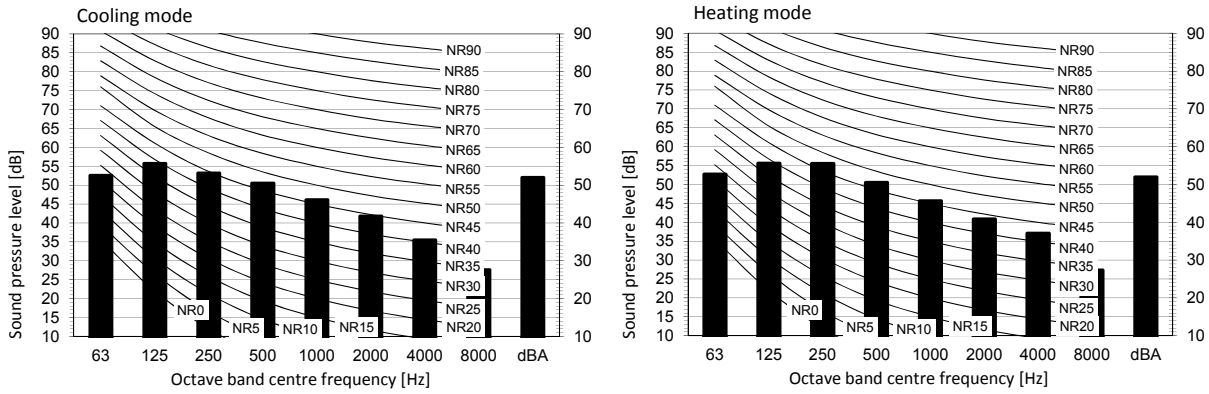

**Legend**

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B Fan speed: High


Cooling Total dB

A	B
dBA	52

Heating Total dB

A	B
dBA	52

Location of microphone



**Notes**

1. Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

3D115243


# 10 Operation range

## 10 - 1 Operation Range


### ARXF-D

#### RXF20-42D

#### Cooling

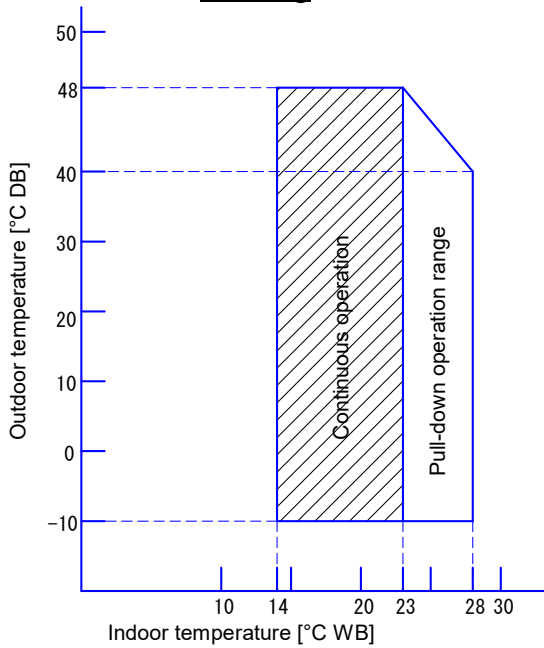

#### Heating

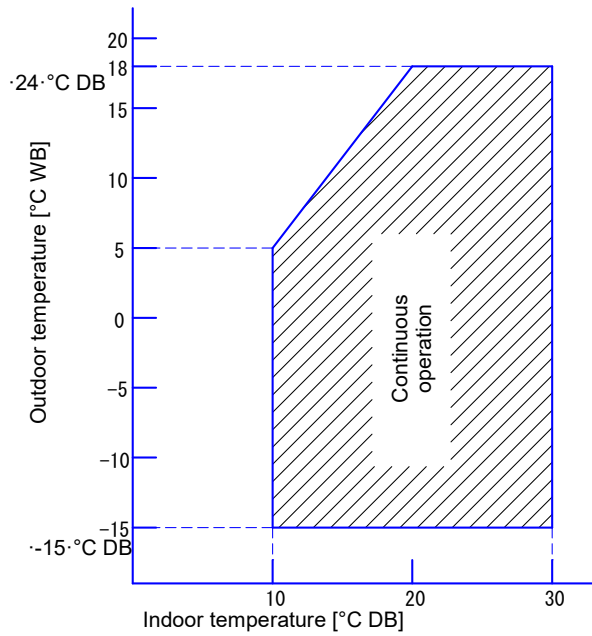

**Notes**

1.The graphs are based on the following conditions.

Corresponding refrigerant piping length: 5 m

Level difference: 0 m


Air flow rate High

2.Editable data for this drawing are available in the GDE (E-BOM) system.


**3D669693**

### RXF50-71D

#### Cooling

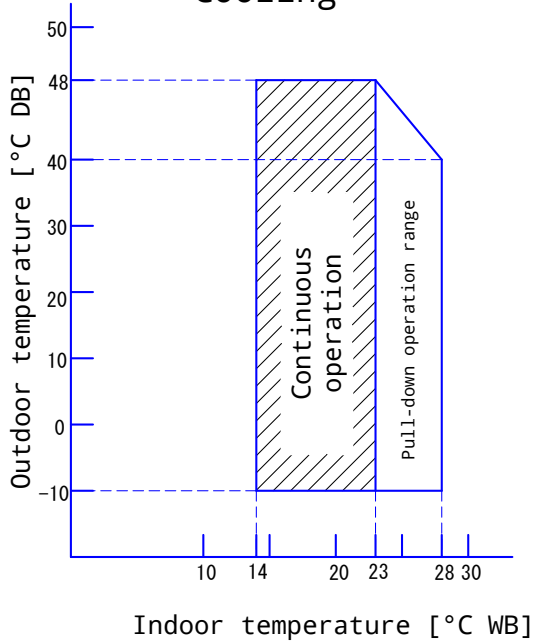

#### Heating

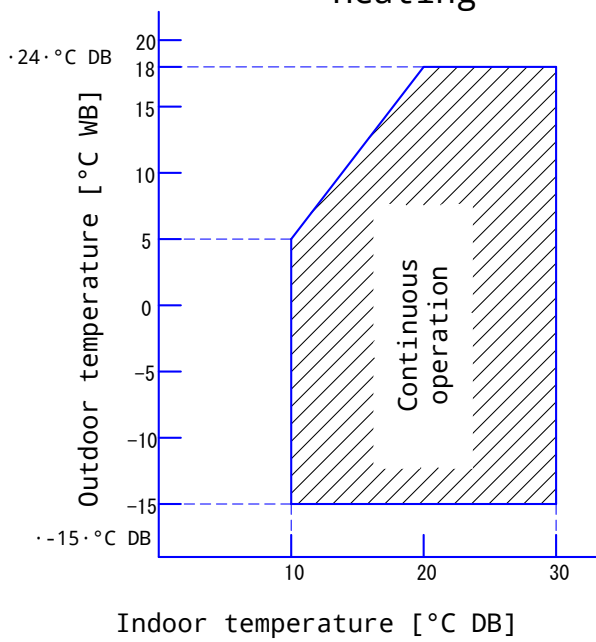

The graphs is based on the following conditions.

Corresponding refrigerant piping length: 5 m


Level difference: 0 m

Air flow rate High

**3D136807**

---

**Daikin Europe N.V.** Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)

EEDEN22A

11/2022



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.